

Product Catalogue

Hollow Rotary Table



Product Photo

产品图片

HRT Series



HRTJ Series



HRTZ Series



HRM Series



HRMD Series



HRN Series



CONTENTS

HRT Series

Large Aperture Hollow Rotating Platform

HRT-62	P02
HRT-85	P05
HRT-130	P12
HRT-200	P17
HRT-280	P21

HRTJ Series

Reinforced Hollow Rotating Platform

HRTJ-130	P24
HRTJ-200	P27
HRTJ-280	P29

HRTZ Series

Heavy-duty Hollow Rotating Platform

HRTZ-200	P32
HRTZ-280	P34

HRM Series

Right Angle Hollow Rotating Platform

HRM-130	P37
HRM-180	P39
HRM-260	P41

HRMD Series

Right Angle Hollow Rotating Platform

HRMD-180	P44
HRMD-225	P45

HRN Series

Inner Ring Rotating Hollow Rotating Platform

HRN-230	P46
---------	-----

Instructions

How to Connect Motor	P49
Installation Instruction	P51

中空旋转平台

圆周定位的最佳选择

The Best Choice for Rotary Positioning

通过运用高精度的齿轮传动，能够实现任意角度位置的定位，让您不在为旋转定位时固定的工位位置而烦恼。两个小孔是连接光电开关，方便电气中的零点控制。

Through the use of high-precision gear transmission, it can realize the positioning at any angle position, so that you are no longer worried about the fixed position of the rotating positioning. The two small holes are connected to the photoelectric switch, which is convenient for zero point control in the electric.

HRTJ/HRTZ系列中间设有防倾覆稳定环，能大大增强倾覆力矩，有效解决侧装吊装等承载问题。

The HRTJ / HRTZ series is equipped with an anti-overturning stability ring in the middle, which can greatly enhance the overturning moment and effectively solve the load-bearing problems such as side-mounted hoisting.

与分割器结构类似、运用独特的轴承结构，不需要增加额外的支撑系统。即可将负载直接放置在中空旋转平台盘面上转动，并且较大的中孔结构设计能够使您的布线更加便捷。

Similar to the Indexer structure, it uses a unique bearing structure and does not require additional support systems. The load can be directly placed on the hollow rotating platform for transmission, and the larger hole structure design can make your wiring more convenient.

底部与伺服电机或步进电机的安装设计完美匹配，并且可以按照你的要求定制安装设计，使您在选择伺服电机或步进电机时更加任意。

The bottom is perfectly matched with the installation design of the servo motor or stepper motor, and the installation design can be customized according to your requirements, allowing you to be more arbitrary when choosing a servo motor or stepper motor.

水平的结构与定位销钉的设计，让您的安装更加方便、精准。

The horizontal structure and the design of positioning pins make your installation more convenient and accurate.

Features 产品特点

中空结构 Hollow structure

中空旋转平台的转盘为中空结构，电机连接在侧边，方便治具中的气管、电线安装。与分割器和DD马达相同，可将重物直接固定在平台上传动。且我司成功研发HRMD系列直角中空旋转平台，有效解决了由之前高度空间受限导致安装空间不够等问题。

The turntable of the hollow rotating platform is a hollow structure, and the motor is connected to the side, which is convenient for the installation of the gas pipe and the wire in the jig. Same as the divider and the DD motor, the heavy objects can be directly fixed on the platform for transmission. In addition, our company successfully developed the HRMD series of right-angle hollow rotating platforms, which effectively solved the problem of insufficient installation space caused by the previous limited height and space.

马达任意配置，速比任意选择 The motor of any configuration, arbitrarily selected ratio


中空旋转平台通过定制法兰及输入轴孔的方式灵活变换接口尺寸大小，适合连接任意品牌的伺服电机、步进电机。市场标准速比很单一，由输入齿轮跟输出齿轮比例产生速比，我司通过设计采用多级齿轮传动方式，实现了同一转台多个速比，相同速比下我司可承载扭矩更大等特点。

Hollow rotating platform can flexibly change the size of the interface by customizing the flange and input shaft hole, which is suitable for connecting servo motors and stepping motors of any brand. The market standard speed ratio is very single. The ratio is produced by the ratio of the input gear to the output gear. Through the design of multi-stage gear transmission, our company has achieved multiple speed ratios on the same turntable, and our company has the characteristics of greater torque capacity under the same speed ratio.

适用于多工况 Suitable for multiple working conditions

考虑到产品使用时的侧向力等问题，我们设计采用交叉滚子轴承，并且中间设有防倾覆稳定环。以便更好地承受使用过程中的侧向力负载。根据侧装、吊装以及倾覆力较大的工况，我公司单独设计了一款HRTZ系列重载型中空旋转平台减速机。

Taking into account the lateral force when the product is in use, our design adopts cross-roller bearings, and there is an anti-overturning stability ring in the middle. In order to better bear the lateral load during use. According to the working conditions of side mounting, hoisting and large overturning force, our company separately designed a HRTZ series heavy-duty hollow rotating platform reducer.

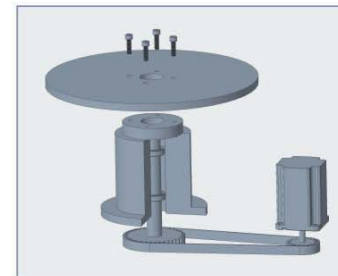

皮带轮+机构部件再连接电机
Pulley + mechanism parts and then connected to the motor

加工工艺 Processing technology

中空旋转平台本体采用铝合金材料，经高精度CNC加工，以确保各部位的精度。齿轮采用渗碳热处理及研磨的工艺，加工后可达到5级齿轮精度，并且其表面硬度可达到58-62HRC。产品组装完成后，会再进行一道研磨工序，以确保端面的平行度和垂直度达到一丝以内的跳动。

The main body of hollow rotating platform is made of aluminum alloy and processed by high-precision CNC to ensure the accuracy of each part. The gear adopts the process of carburizing heat treatment and grinding. After processing, it can reach the gear accuracy of grade 5, and its surface hardness can reach 58-62HRC. After the product is assembled, another grinding process will be carried out to ensure that the parallelism and perpendicularity of the end face reaches within a trace of runout.

重复定位精度高 High repeat positioning accuracy


中空旋转平台部分齿轮精度等级达4级，使得中空旋转平台的空回极小，并且我司通过可调节齿轮中心距的设计，弥补装配时产生的误差，重复定位精度可达到10弧秒以下。

The precision level of some gears of hollow rotating platform reaches level 4, which makes the hollow return of the hollow rotating platform extremely small, and our company uses the design of adjustable gear center distance to compensate for the error generated during assembly. The repeat positioning accuracy can reach 10 arc seconds. the following.

直接连接——节省设计工时 Direct connection-save design time

可直接将装置的工作台及机械手臂安装在中空旋转平台转盘上。与使用皮带轮等机构零件时相比，可减少机构设计、零件调配、皮带状态调节等的工时与费用。

The working table and mechanical arm of the device can be directly installed on the hollow rotating platform turntable. Compared with the use of belt pulleys and other mechanical parts, it can reduce the man-hours and costs of mechanism design, parts allocation, and belt state adjustment.

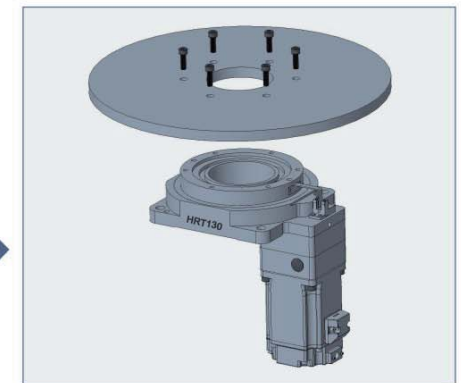

中空旋转平台直接连电机
The hollow rotating platform is directly connected to the motor

HRT Series

Large Aperture Hollow Rotating Platform

大孔径中空旋转平台



大孔径中空旋转平台
Large Aperture Hollow Rotating Platform



订货型号表示

Order Code

HRT	-	62	-	RL	-	10	-	8	-	30	-	45
系列 Serial		型号规格 Model		选配 Optional		速比 Ratio		电机轴径 Motor Shaft Diameter		电机定位凸台 Motor Positioning Convex		电机安装孔距 Motor Installation Hole Distance
HRT		62		RL: 直角标准 RY: 直角右 RZ: 直角左		5/10						注: (伺服电机安装面对角孔距) (步进电机安装面单边孔距)
HRTJ		85										Note: Diagonal hole distance for Servo Motor Unilateral hole distance for Stepper Motor
HRTZ		130										
HRM		200										
HRMD		280										
HRN												

技术参数


Technical Parameter

型号 Model			HRT62	
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing	
减速比	Reduction ratio	I	5	10
额定输出扭矩	Rated output torque	N.m	5	4
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque	
定位精度	Positioning accuracy	arc-min	≤2	
反复定位精度	Repeated positioning accuracy	arc-sec	≤15	
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation	
适配伺服马达	Adapt to servo motor	W	50-100	
适配步进马达	Suitable for stepping motor		42 步进 Stepper NEMA 17	
容许轴向负载	Allowable axial load	N	230	
容许惯性力矩	Allowable moment of inertia	N.m	5	
扭转刚性	Torsional rigidity	N.m/arcmin	2.5	
齿隙	Backlash		无齿隙 (可调节结构) No backlash (Adjustable structure)	
精度寿命	Accuracy life	h	30000h (间歇运转) Intermittent operation	
防护等级	Protection level	IP	50	
润滑方式	Lubrication method		长效润滑 Long-term lubrication	
安装方式	Installation method		任意 Horizontal / Vertical / Suspension	
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01	
旋转平台平行度	Parallelism of rotating platform	mm	≤0.01	
传动效率	Transmission efficiency	%	95	
噪音	Noise	db	≤55	
重量	Weight	kg	0.6	
设计承重	Design load	kg	7	5


* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

外形尺寸图表 Outline dimensional

HRT62-5 配42步进接口 for 42 Stepper Interface

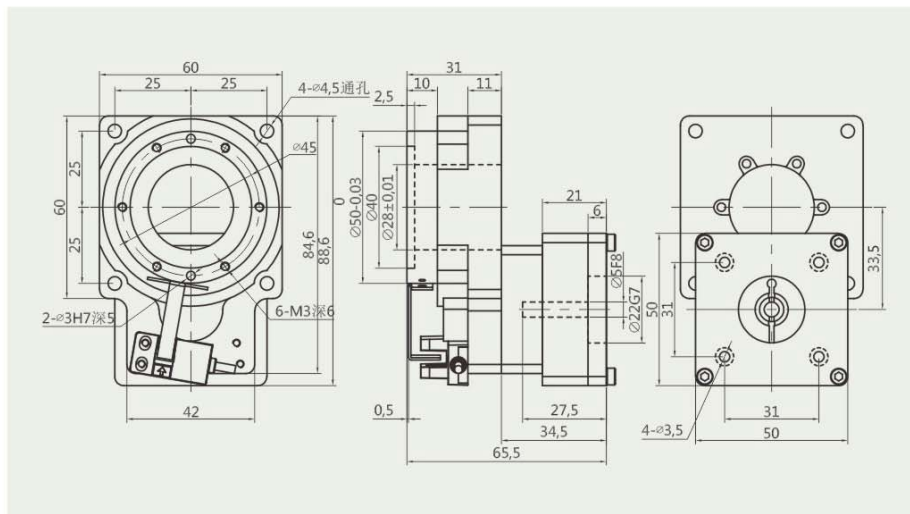


HRT62-5 配100W伺服接口 for 100W Servo Interface

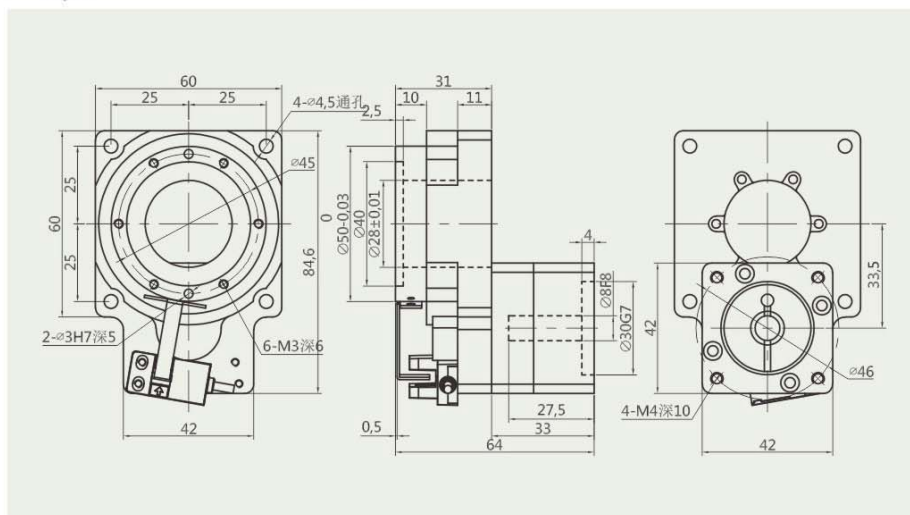


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

外形尺寸图表 Outline dimensional

HRT62-10 配42步进接口 for 42 Stepper Interface

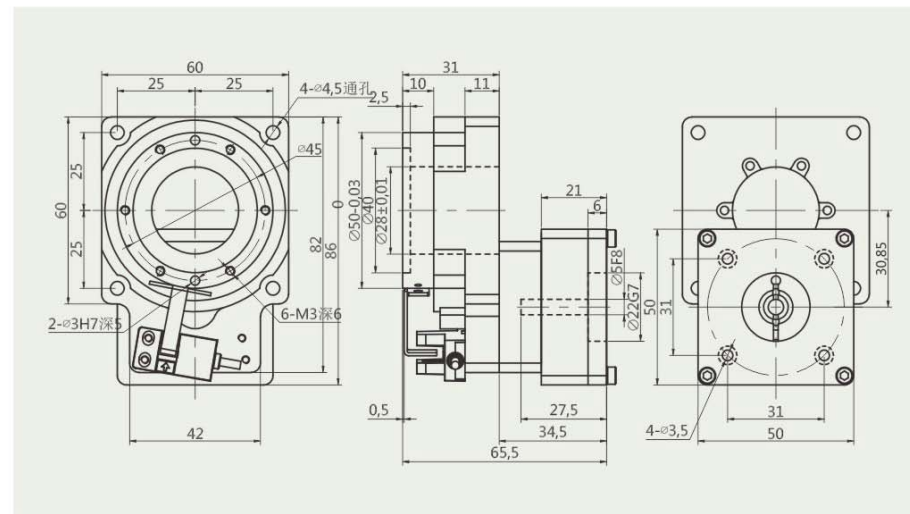

HRT62-10 配100W伺服接口 for 100W Servo Interface

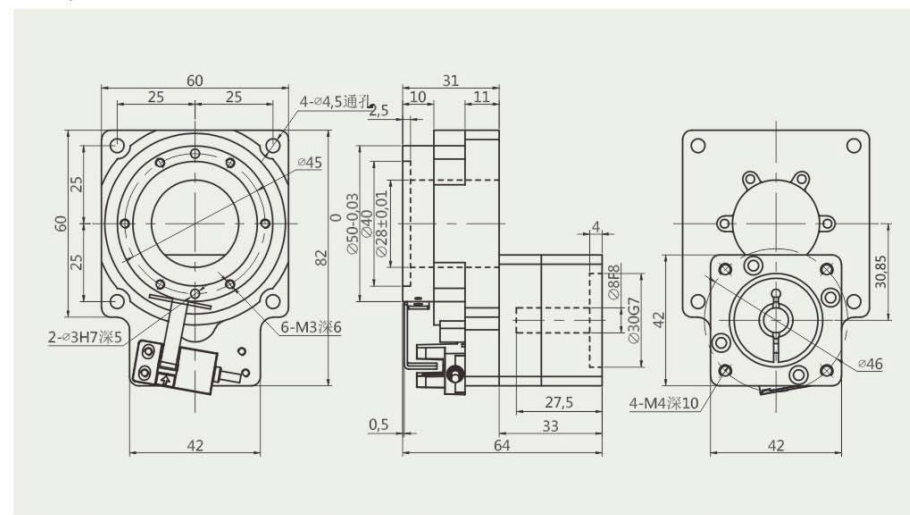

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。



订货型号表示 Order Code

系列 Serial	型号规格 Model	选配 Optional	速比 Ratio	电机轴径 Motor Shaft Diameter	电机定位凸台 Motor Positioning Convex	电机安装孔距 Motor Installation Hole Distance
HRT	85	RL	10	14	50	70
HRTJ	62	RL: 直角标准	5/10			
HRTZ	85	RY: 直角右				
HRM	130	RZ: 直角左				
HRMD	200	JS: 同轴减速机				
HRN	280	RL: Right angle-Standard RY: Right angle-Right Direction RZ: Right angle-Left Direction JS: Coaxial Reducer				

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:
Diagonal hole distance for Servo Motor
Unilateral hole distance for Stepper Motor

技术参数

Technical Parameter


型号 Model	HRT85	HRT85RL/RY/RZ (JS)
轴承结构 Bearing structure	交叉滚子轴承 Cross roller bearing	
减速比 Reduction ratio	I	5 10 20 25 50
额定输出扭矩 Rated output torque	N.m	28 18 28 18 23 15
最大输出扭矩 Output torque	N.m	3倍额定扭矩 3 Times rated torque
定位精度 Positioning accuracy	arc-min	≤1 ≤3
反复定位精度 Repeated positioning accuracy	arc-sec	≤15 ≤30
容许盘面转速 Allowable disk speed	rpm	200 (间歇运转) Intermittent operation
适配伺服马达 Adapt to servo motor	W	200-400
适配步进马达 Suitable for stepping motor		57 步进 Stepper NEMA 23
容许轴向负载 Allowable axial load	N	500
容许惯性力矩 Allowable moment of inertia	N.m	10
扭转刚性 Torsional rigidity	N.m/arcmin	6
齿隙 Backlash		无齿隙 (可调节结构) No backlash (Adjustable structure)
精度寿命 Accuracy life	h	30000h (间歇运转) Intermittent operation
防护等级 Protection level	IP	50
润滑方式 Lubrication method		长效润滑 Long-term lubrication
安装方式 Installation method		任意 Horizontal / Vertical / Suspension
旋转平台同心度 Concentricity of rotating platform	mm	≤0.01
旋转平台平行度 Parallelism of rotating platform	mm	≤0.01
传动效率 Transmission efficiency	%	95 90
噪音 Noise	db	≤55 ≤63
重量 Weight	kg	1.4 2.6
设计承重 Design load	kg	28 20

① HRT85JS系列速比有15/20/25/35/50等。额定输出扭矩28N.m。
The speed ratio of HRT85JS series is 15/20/25/35/50 etc. The rated output torque is 28N.m.


外形尺寸图表

Outline dimensional

HRT85-5 配400W伺服接口 for 400W Servo Interface

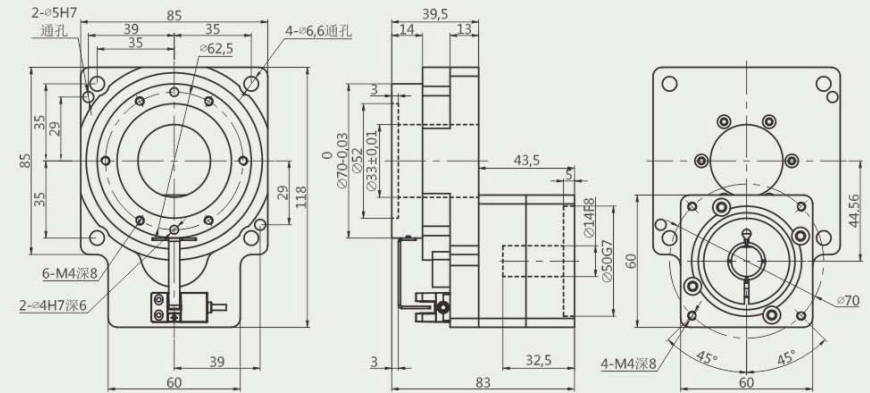


HRT85-5 配57步进接口 for 57 Stepper Interface

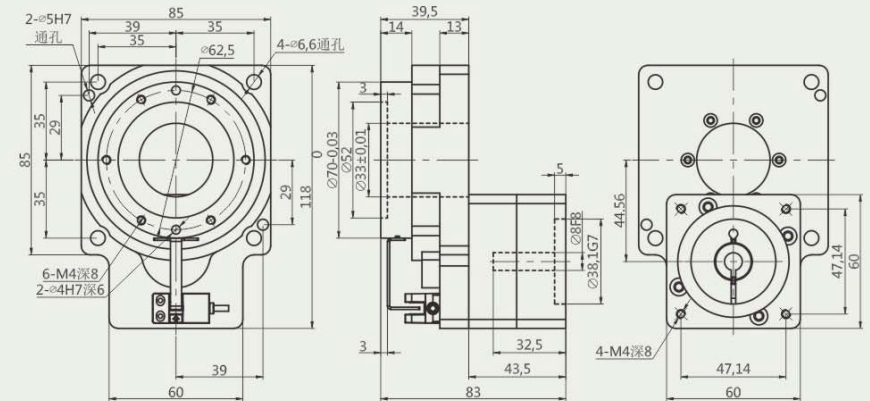


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

外形尺寸图表
Outline dimensional

HRT85JS-15 配400W伺服接口 for 400W Servo Interface

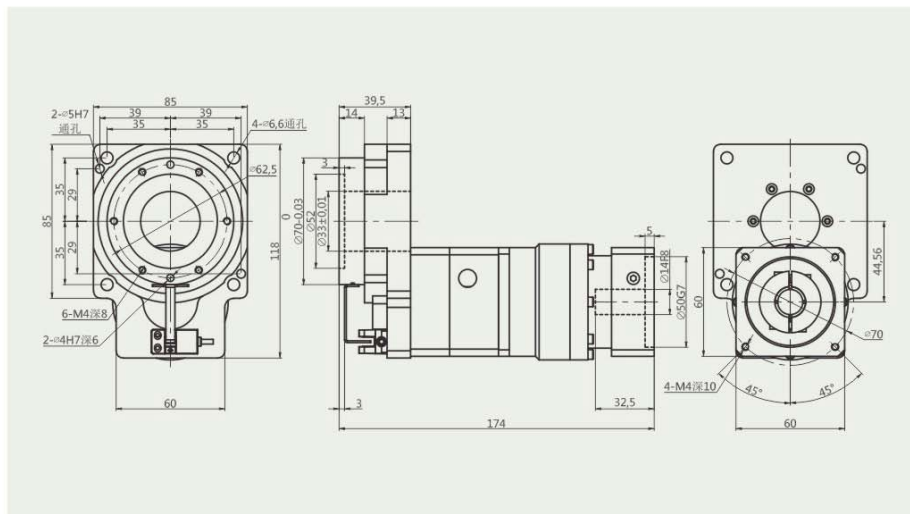


HRT85RL-5 配400W伺服接口 for 400W Servo Interface

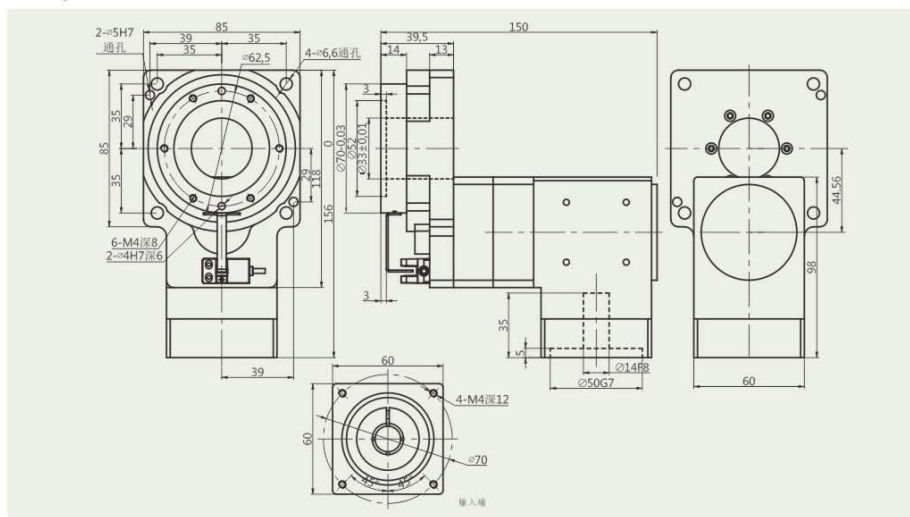


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

外形尺寸图表
Outline dimensional

HRT85RY-5 配400W伺服接口 for 400W Servo Interface

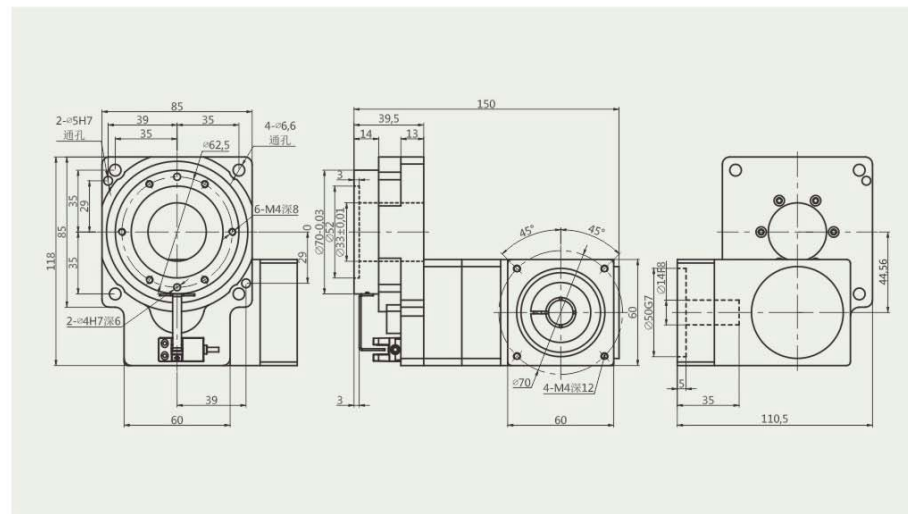


HRT85RZ-5 配400W伺服接口 for 400W Servo Interface

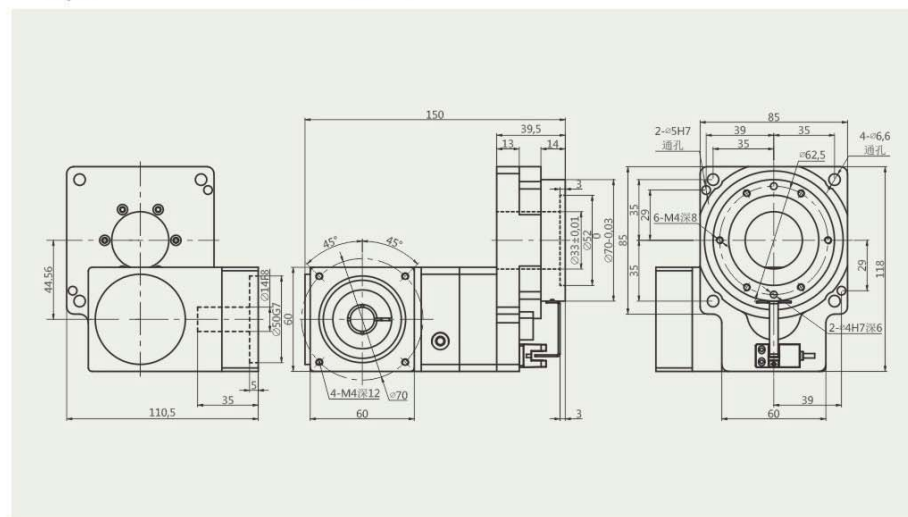


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

外形尺寸图表
Outline dimensional

HRT85-10 配400W伺服接口 for 400W Servo Interface

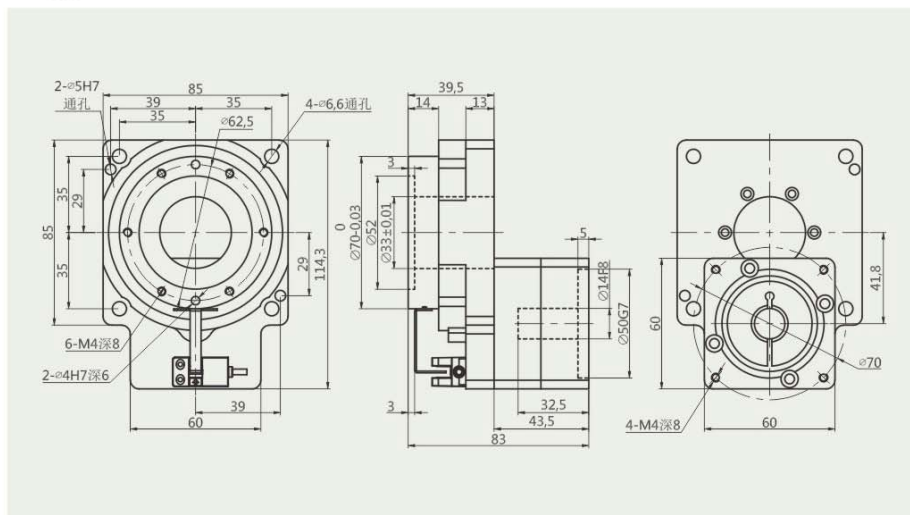


HRT85-10 配57步进接口 for 57 Stepper Interface

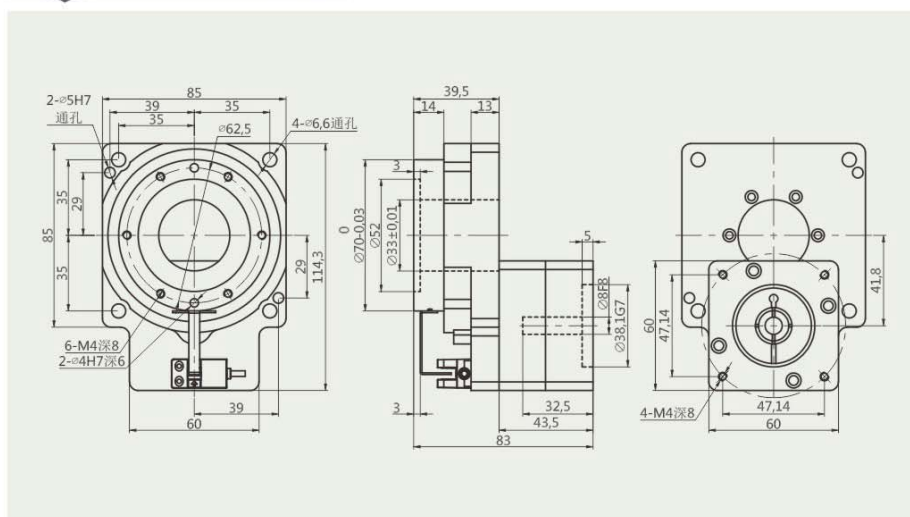


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

外形尺寸图表
Outline dimensional

HRT85RL-10 配400W伺服接口 for 400W Servo Interface

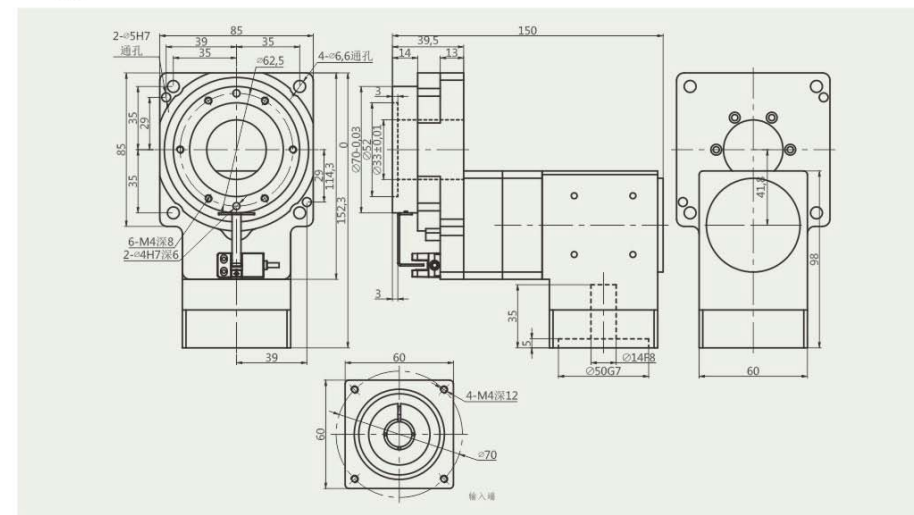


HRT85RY-10 配400W伺服接口 for 400W Servo Interface

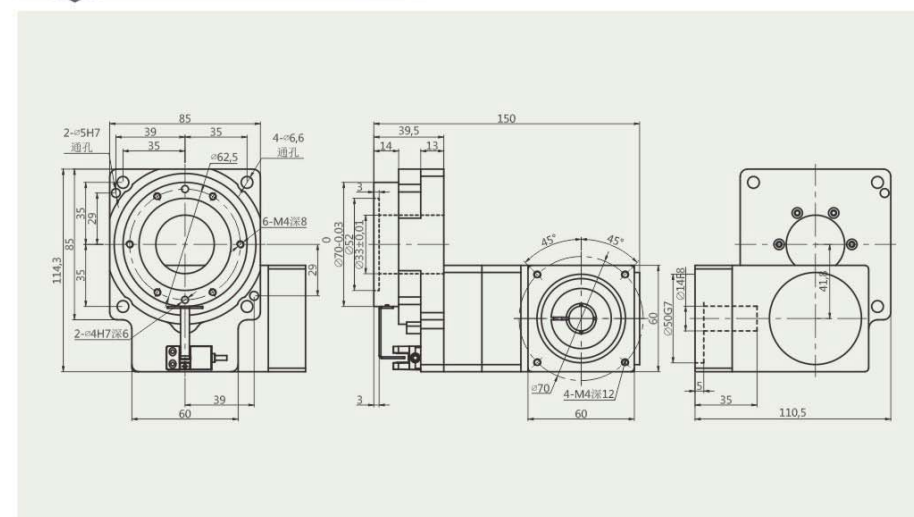

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

HRT85RZ-10 配400W伺服接口 for 400W Servo Interface

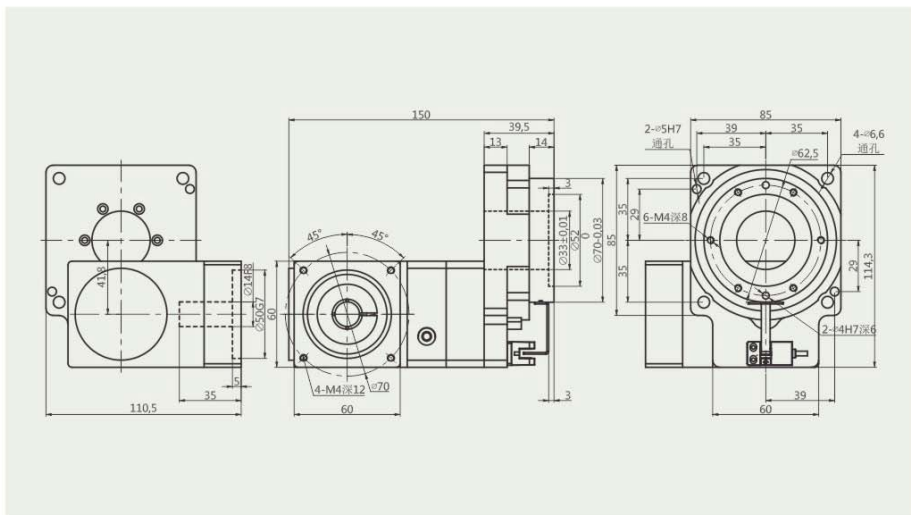

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

HRT - 130 - RL - 10 - 14 - 50 - 70

Series	Model	Optional	Ratio	Motor Shaft Diameter	Motor Positioning Convex	Motor Installation Hole Distance
HRT	62	RL: 直角标准	10/18			注: (伺服电机安装面对角孔距)
HRTJ	85	RY: 直角右				(步进电机安装面单边孔距)
HRTZ	130	RZ: 直角左				
HRM	200	JS: 同轴减速机				注:
HRMD	280	RL: 直角标准				Diagonal hole distance for Servo Motor
HRN		RY: 直角右				Unilateral hole distance for Stepper Motor


技术参数
Technical Parameter

型号 Model			HRT130		HRT130RL/RV/RZ (JS)		
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing				
减速比	Reduction ratio	I	10	18	10	20	50
额定输出扭矩	Rated output torque	N.m	40	28	40	40	35
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque				
定位精度	Positioning accuracy	arc-min	≤1		≤3		
反复定位精度	Repeated positioning accuracy	arc-sec	≤15		≤30		
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation				
适配伺服马达	Adapt to servo motor	W	200-400				
适配步进马达	Suitable for stepping motor		57-86 步进 Stepper NEMA 23 / 34				
容许轴向负载	Allowable axial load	N	2000				
容许惯性力矩	Allowable moment of inertia	N.m	50				
扭转刚性	Torsional rigidity	N.m/arcmin	19				
齿隙	Backlash		无齿隙 (可调节结构) No backlash (Adjustable structure)				
精度寿命	Accuracy life	h	30000h (间歇运转) Intermittent operation				
防护等级	Protection level	IP	50				
润滑方式	Lubrication method		长效润滑 Long-term lubrication				
安装方式	Installation method		任意 Horizontal / Vertical / Suspension				
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01				
旋转平台平行度	Parallelism of rotating platform	mm	≤0.013				
传动效率	Transmission efficiency	%	95		90		
噪音	Noise	db	≤60		≤60		
重量	Weight	kg	2.6		3.8		
设计承重	Design load	kg	45		30		


① HRT130JS series speed ratio has 30/40/50/70/100 etc. The rated output torque is 40N.m. ② If the parallelism of the rotating platform has higher requirements, please contact our sales staff

外形尺寸图表
Outline dimensional

HRT130-10 (18) 配400W伺服接口 for 400W Servo Interface

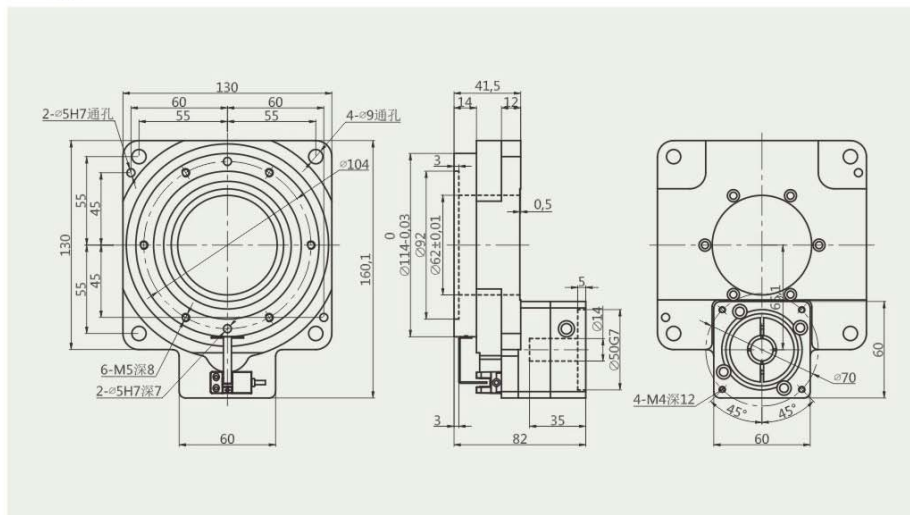


HRT130-10 (18) 配57步进接口 for 57 Stepper Interface

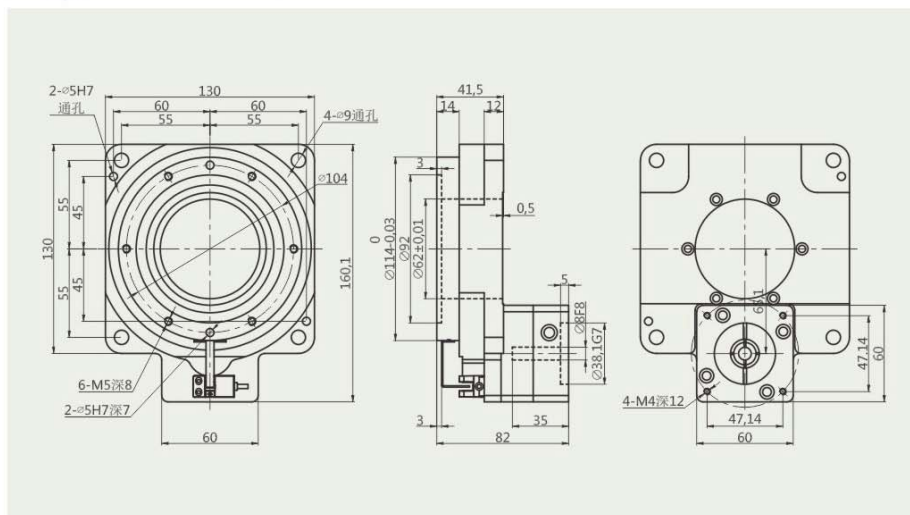


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

外形尺寸图表
Outline dimensional

HRT130-10 (18) 配86步进接口 for 86 Stepper Interface

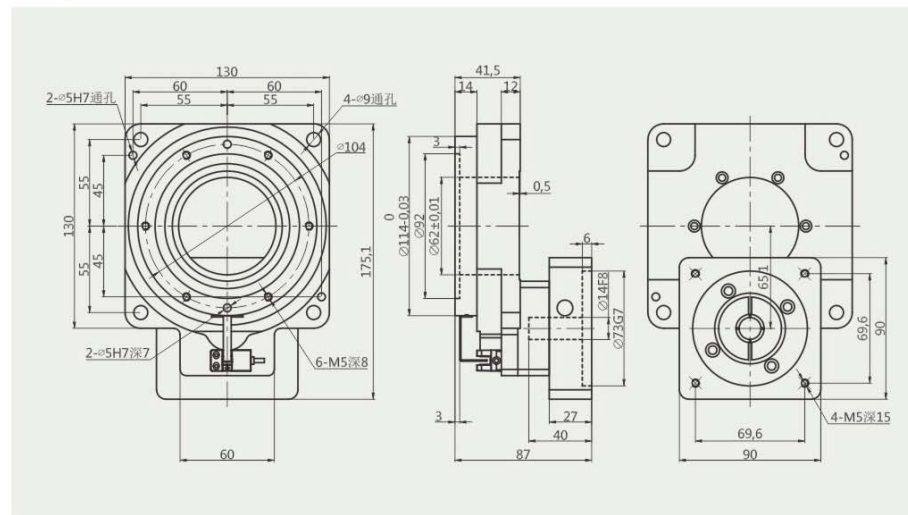


HRT130JS-30 配400W伺服接口 for 400W Servo Interface

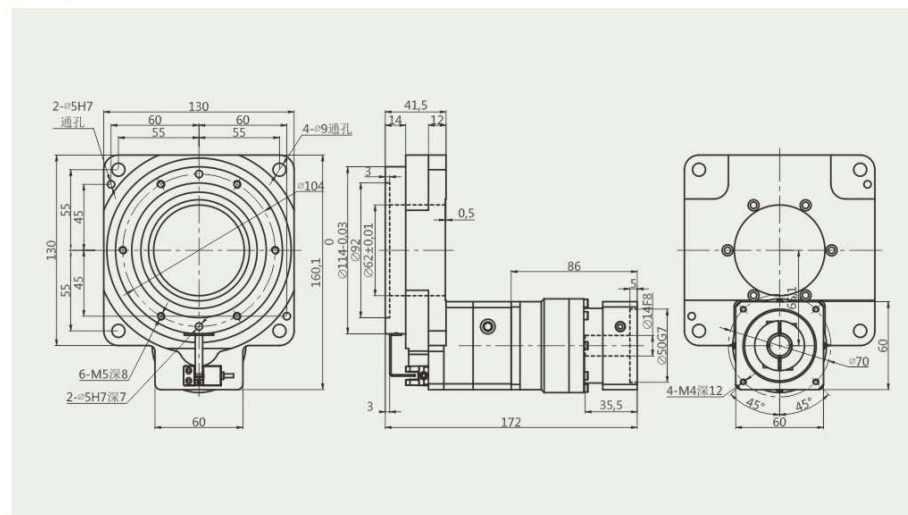


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

外形尺寸图表
Outline dimensional

HRT130RL-10 配400W伺服接口 for 400W Servo Interface

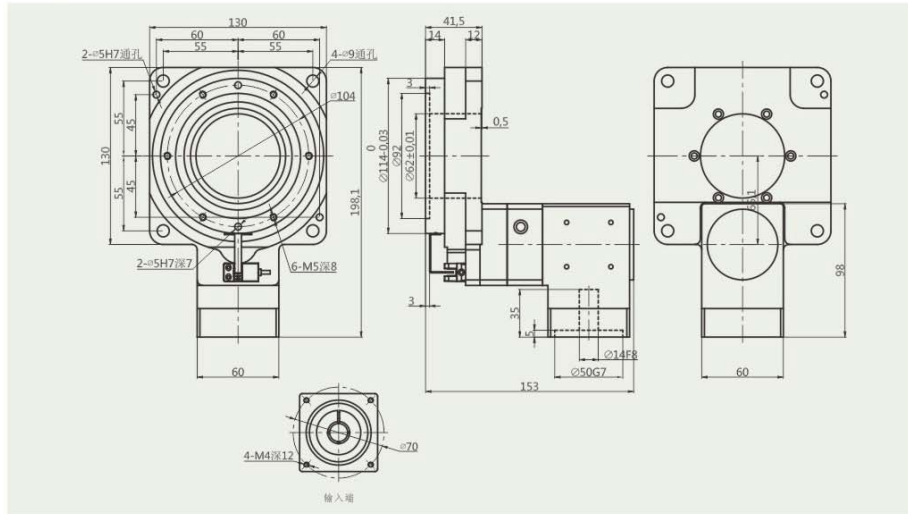
外形尺寸图表
Outline dimensional

HRT130RZ-10 配400W伺服接口 for 400W Servo Interface

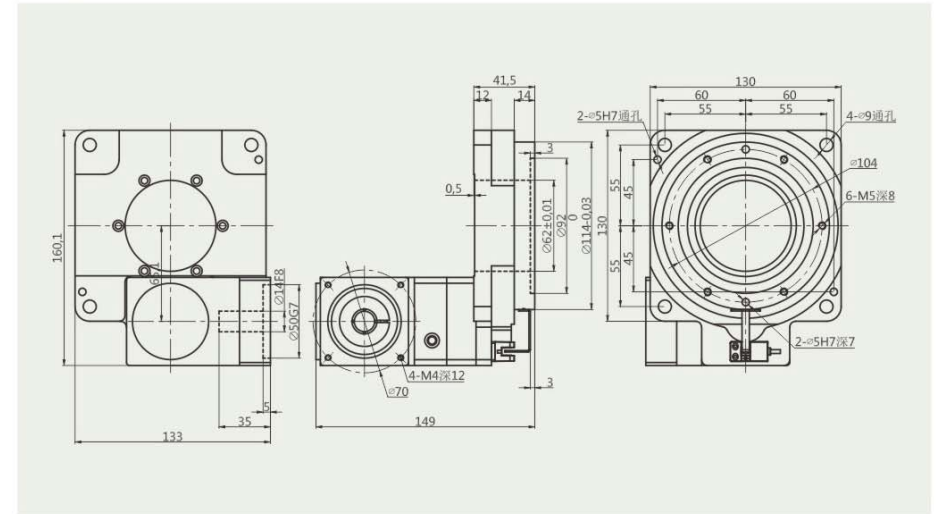

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

HRT130RY-10 配400W伺服接口 for 400W Servo Interface

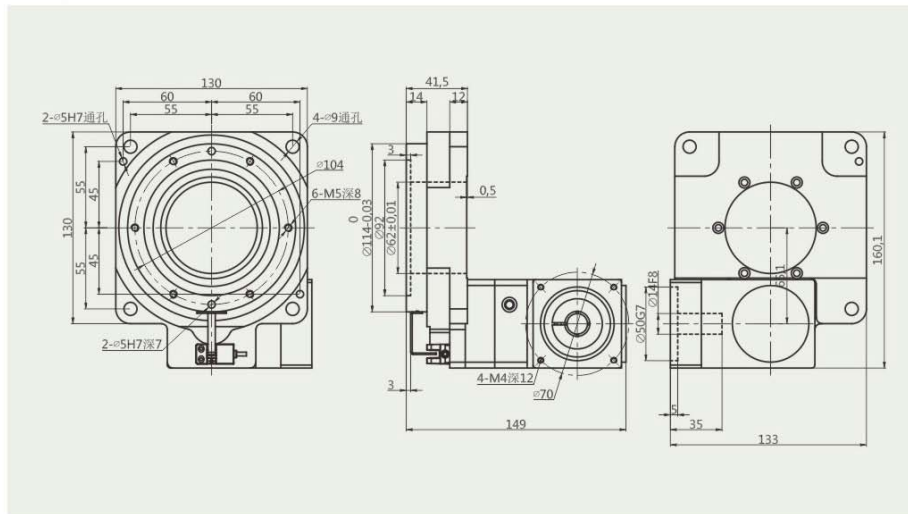

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。



订货型号表示 Order Code

HRT	-	200	-	RL	-	10	-	19	-	70	-	90
系列 Serial		型号规格 Model		选配 Optional		速比 Ratio		电机轴径 Motor Shaft Diameter		电机定位凸台 Motor Positioning Convex		电机安装孔距 Motor Installation Hole Distance
HRT		62		RL: 直角标准		10/18						注: (伺服电机安装面对角孔距) (步进电机安装面单边孔距)
HRTJ		85		RY: 直角右								Note: Diagonal hole distance for Servo Motor Unilateral hole distance for Stepper Motor
HRTZ		130		RZ: 直角左								
HRM		200		JS: 同轴减速机								
HRMD		280										
HRN												

技术参数


Technical Parameter

型号 Model		HRT200	HRT200RL/RZ/RZ (JS)
轴承结构 Bearing structure		交叉滚子轴承 Cross roller bearing	
减速比 Reduction ratio	I	10	18
额定输出扭矩 Rated output torque	N.m	70	55
最大输出扭矩 Output torque	N.m	3倍额定扭矩 3 Times rated torque	
定位精度 Positioning accuracy	arc-min	≤1	≤3
反复定位精度 Repeated positioning accuracy	arc-sec	≤15	≤30
容许盘面转速 Allowable disk speed	rpm	200 (间歇运转) Intermittent operation	
适配伺服马达 Adapt to servo motor	W	750	
适配步进马达 Suitable for stepping motor		86-110 步进 Stepper NEMA 34	
容许轴向负载 Allowable axial load	N	4000	
容许惯性力矩 Allowable moment of inertia	N.m	100	
扭转刚性 Torsional rigidity	N.m/arcmin	32	
齿隙 Backlash		无齿隙 (可调节结构) No backlash (Adjustable structure)	
精度寿命 Accuracy life	h	30000h (间歇运转) Intermittent operation	
防护等级 Protection level	IP	50	
润滑方式 Lubrication method		长效润滑 Long-term lubrication	
安装方式 Installation method		任意 Horizontal / Vertical / Suspension	
旋转平台同心度 Concentricity of rotating platform	mm	≤0.01	
旋转平台平行度 Parallelism of rotating platform	mm	≤0.02	
传动效率 Transmission efficiency	%	95	90
噪音 Noise	db	≤63	≤63
重量 Weight	kg	8.1	11.6
设计承重 Design load	kg	75	55


① HRT200JS系列速比有30/40/50/70/100等。额定输出扭矩70N.m。② 旋转平台平行度有更高要求请联系我司销售人员
① HRT200JS series speed ratio has 30/40/50/70/100 etc. The rated output torque is 70N.m. ② If the parallelism of the rotating platform has higher requirements, please contact our sales staff

外形尺寸图表 Outline dimensional

HRT200-10 (18) 配750W伺服接口 for 750W Servo Interface

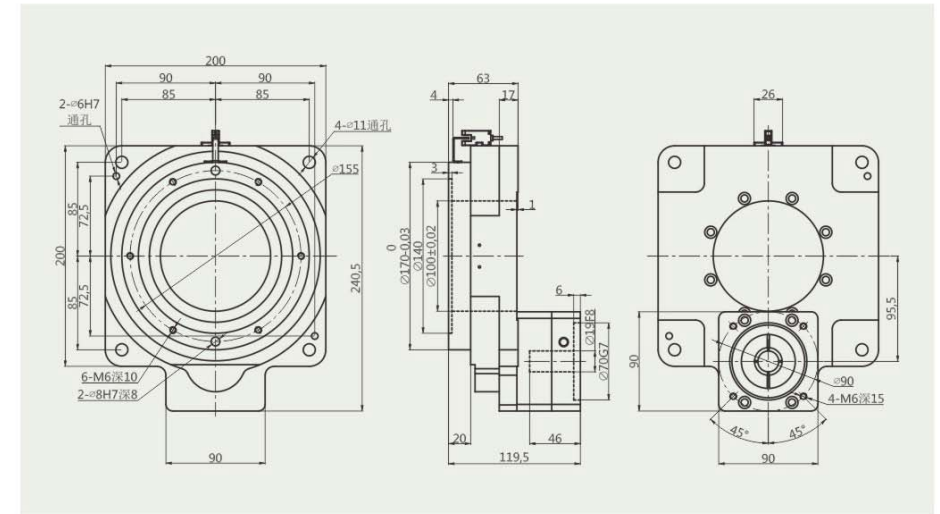


HRT200-10 (18) 配86步进接口 for 86 Stepper Interface

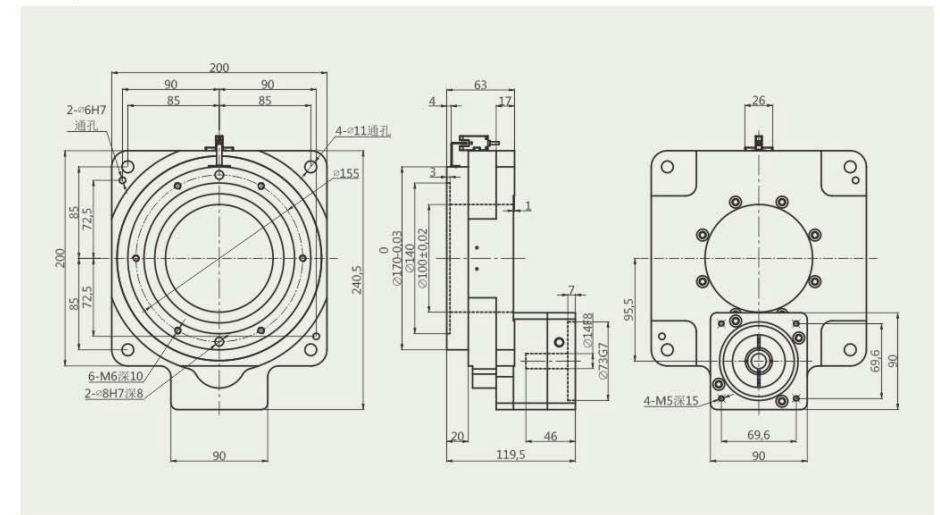

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。


外形尺寸图表
Outline dimensional

HRT200JS-30 配750W伺服接口 for 750W Servo Interface

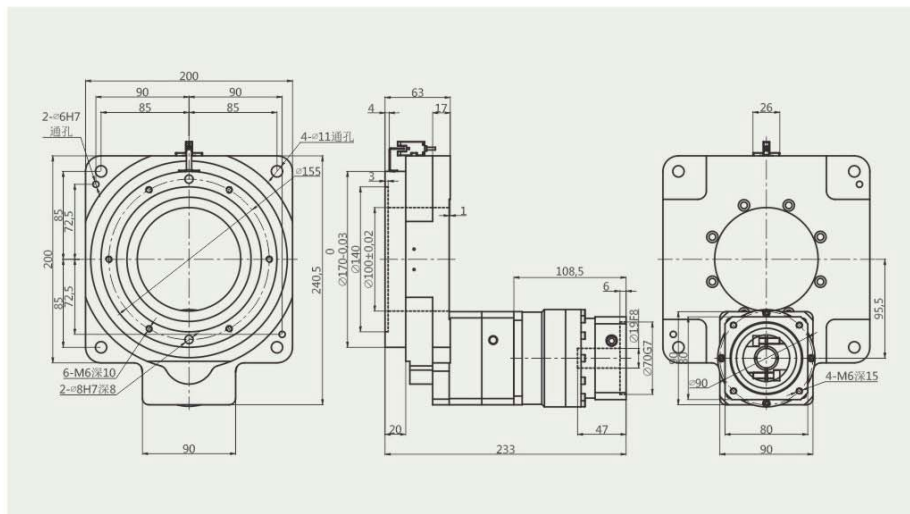


外形尺寸图表
Outline dimensional


HRT200RY-10 配750W伺服接口 for 750W Servo Interface

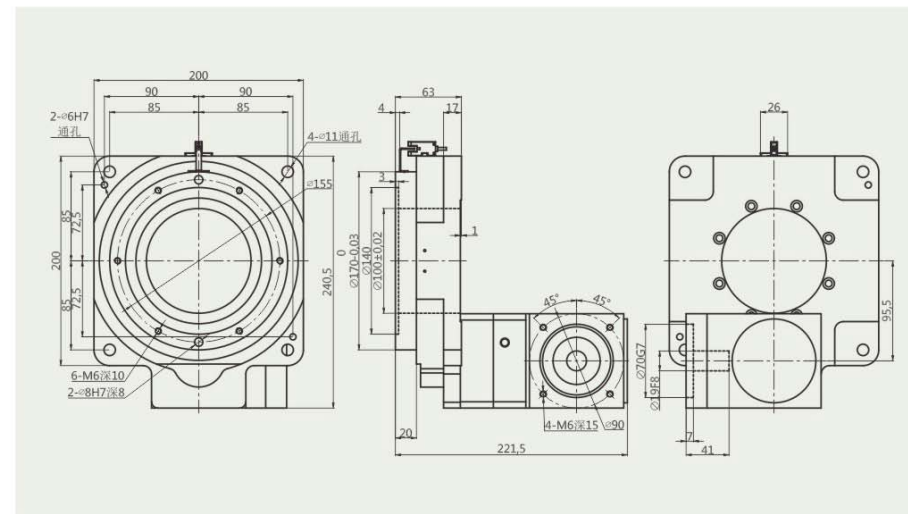

HRT200RL-10 配750W伺服接口 for 750W Servo Interface

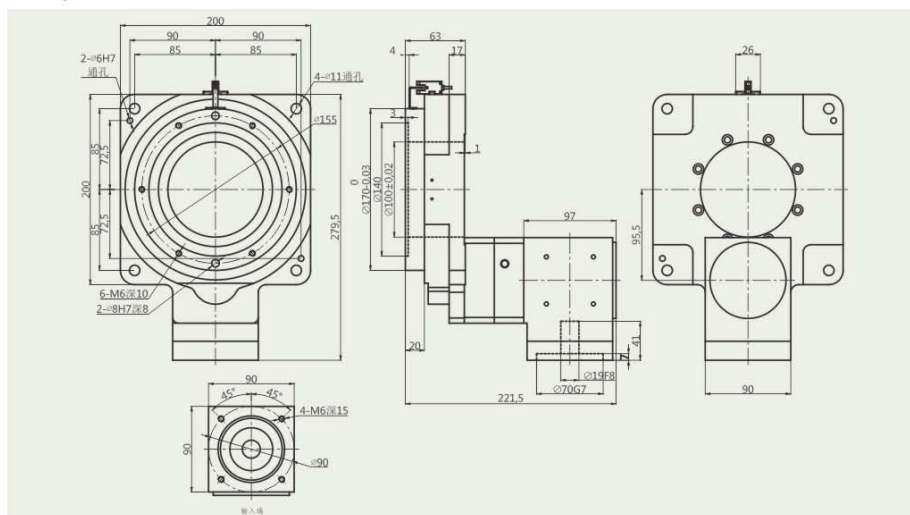

HRT200RZ-10 配750W伺服接口 for 750W Servo Interface

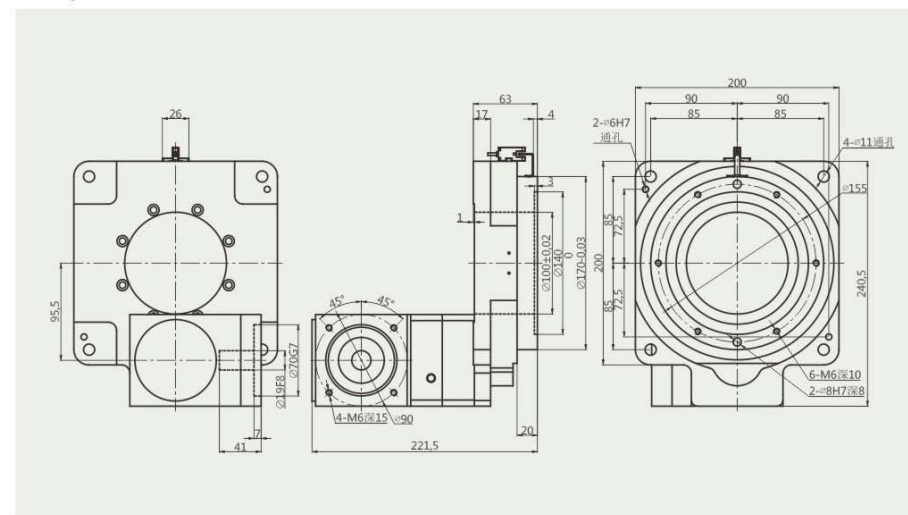

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。



订货型号表示 Order Code

HRT	-	280	-	10	-	24	-	110	-	145
系列 Serial		型号规格 Model		速比 Ratio		电机轴径 Motor Shaft Diameter		电机定位凸台 Motor Positioning Convex		电机安装孔距 Motor Installation Hole Distance
HRT		62		10						
HRTJ		85								
HRTZ		130								
HRM		200								
HRMD		280								
HRN										

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:
Diagonal hole distance for Servo Motor
Unilateral hole distance for Stepper Motor


技术参数 Technical Parameter

型号 Model	HRT280	
轴承结构 Bearing structure		交叉滚子轴承 Cross roller bearing
减速比 Reduction ratio	I	10
额定输出扭矩 Rated output torque	N.m	130
最大输出扭矩 Output torque	N.m	3倍额定扭矩 3 Times rated torque
定位精度 Positioning accuracy	arc-min	≤1
反复定位精度 Repeated positioning accuracy	arc-sec	≤15
容许盘面转速 Allowable disk speed	rpm	150 (间歇运转) Intermittent operation
适配伺服马达 Adapt to servo motor	W	1000-2000
适配步进马达 Suitable for stepping motor		110 步进 Stepper
容许轴向负载 Allowable axial load	N	8000
容许惯性力矩 Allowable moment of inertia	N.m	200
扭转刚性 Torsional rigidity	N.m/arcmin	58
齿隙 Backlash		无齿隙 (可调节结构) No backlash (Adjustable structure)
精度寿命 Accuracy life	h	30000h (间歇运转) Intermittent operation
防护等级 Protection level	IP	50
润滑方式 Lubrication method		长效润滑 Long-term lubrication
安装方式 Installation method		任意 Horizontal / Vertical / Suspension
旋转平台同心度 Concentricity of rotating platform	mm	≤0.015
旋转平台平行度 Parallelism of rotating platform	mm	≤0.03
传动效率 Transmission efficiency	%	95
噪音 Noise	db	≤67
重量 Weight	kg	20
设计承重 Design load	kg	130

注: 旋转平台平行度有更高要求请联系我司销售人员
If the parallelism of the rotating platform has higher requirements, please contact our sales staff

外形尺寸图表 Outline dimensional

HRT280-10 配1KW伺服接口 for 1KW Servo Interface

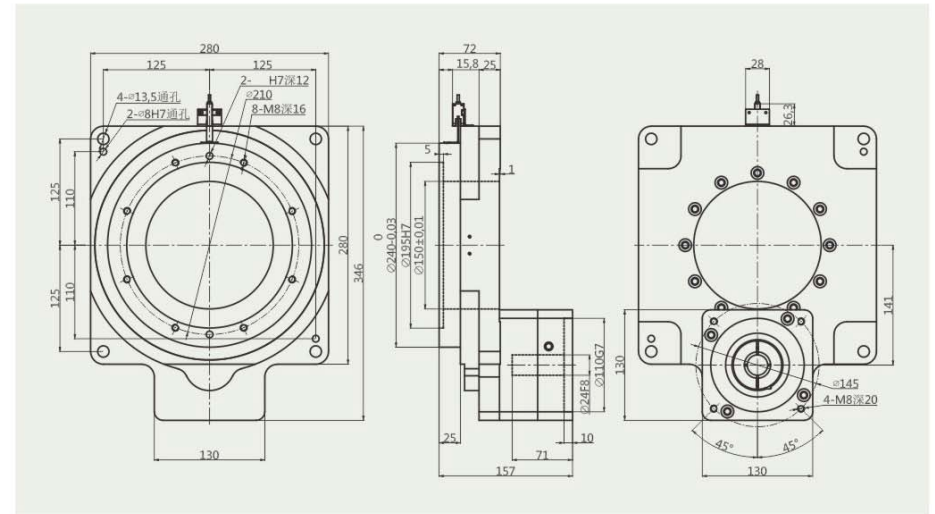

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

HRTJ Series

Reinforced Hollow Rotating Platform

加强型中空旋转平台



加强型中空旋转平台
Reinforced Hollow Rotating Platform



订货型号表示

Order Code

HRTJ - 130 - JS - 10 - 14 - 50 - 70

系列
Serial

HRT
HRTJ
HRTZ
HRM
HRMD
HRN

型号规格
Model

130
200
280

选配
Optional

RL: 直角标准
RY: 直角右
RZ: 直角左
JS: 同轴减速机

10/18

速比
Ratio

电机轴径
Motor Shaft
Diameter

14

电机定位凸台
Motor Positioning
Convex

50

电机安装孔距
Motor Installation
Hole Distance

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:
Diagonal hole distance for Servo Motor
Unilateral hole distance for Stepper Motor

技术参数


Technical Parameter

型号 Model			HRTJ130		HRTJ130JS				
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing						
减速比	Reduction ratio	I	10	18	30	40	50	70	100
额定输出扭矩	Rated output torque	N.m	50	35	50	50	50	50	50
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque						
定位精度	Positioning accuracy	arc-min	≤1		≤3				
反复定位精度	Repeated positioning accuracy	arc-sec	≤15		≤30				
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation						
适配伺服马达	Adapt to servo motor	W	200-400						
适配步进马达	Suitable for stepping motor		57-86 步进 Stepper NEMA 23 / 34						
容许轴向负载	Allowable axial load	N	2500						
容许惯性力矩	Allowable moment of inertia	N.m	50						
扭转刚度	Torsional rigidity	N.m/arcmin	19						
倾覆力矩	Overturning moment	N.m	530						
精度寿命	Accuracy life	h	30000h (间歇运转) Intermittent operation						
防护等级	Protection level	IP	50						
润滑方式	Lubrication method		长效润滑 Long-term lubrication						
安装方式	Installation method		任意 Horizontal / Vertical / Suspension						
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01						
旋转平台平行度	Parallelism of rotating platform	mm	≤0.013						
传动效率	Transmission efficiency	%	95		90				
噪音	Noise	db	≤60		≤60				
重量	Weight	kg	3		4.3				
设计承重	Design load	kg	50		35				

旋转平台平行度有更高要求请联系我司销售人员
If the parallelism of the rotating platform has higher requirements, please contact our sales staff


外形尺寸图表
Outline dimensional

HRTJ130-10(18) 配400W伺服接口 for 400W Servo Interface

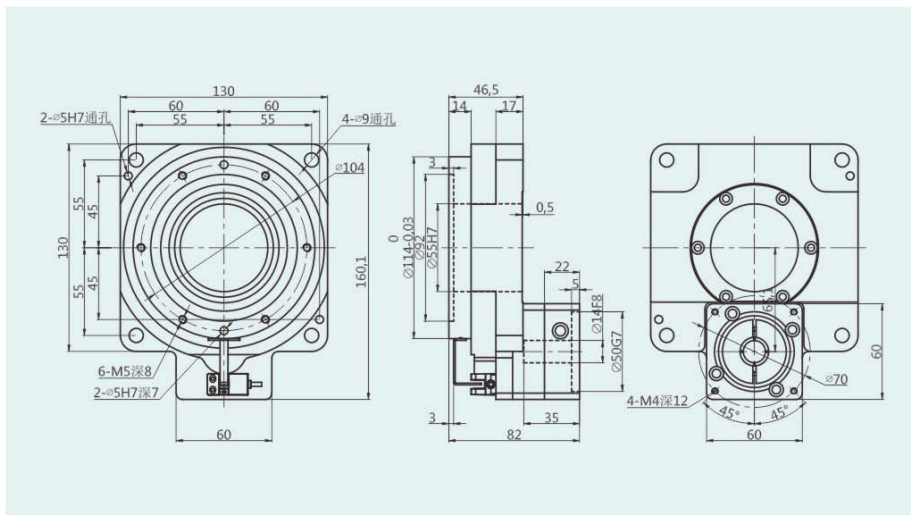


外形尺寸图表
Outline dimensional


HRTJ130-10(18) 配86步进接口 for 86 Stepper Interface

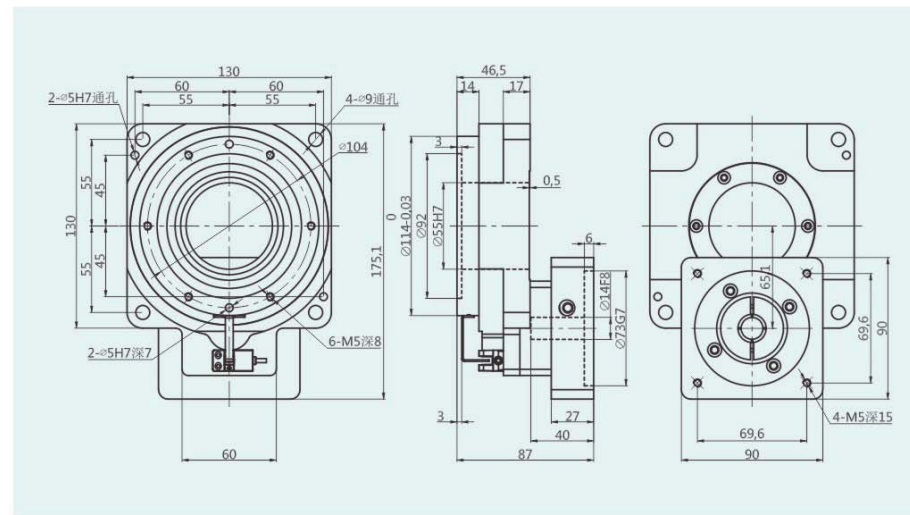

HRTJ130-10(18) 配57步进接口 for 57 Stepper Interface

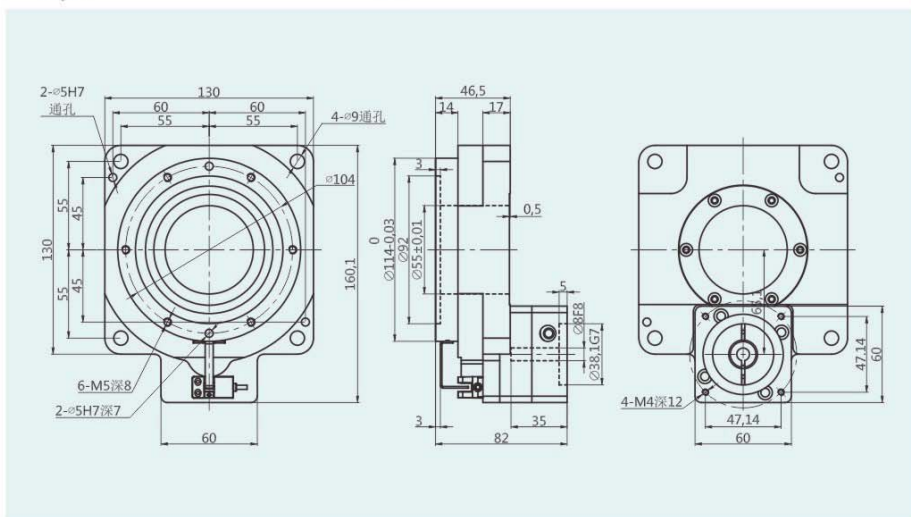

HRTJ130JS-30配400W伺服接口 for 400W Servo Interface

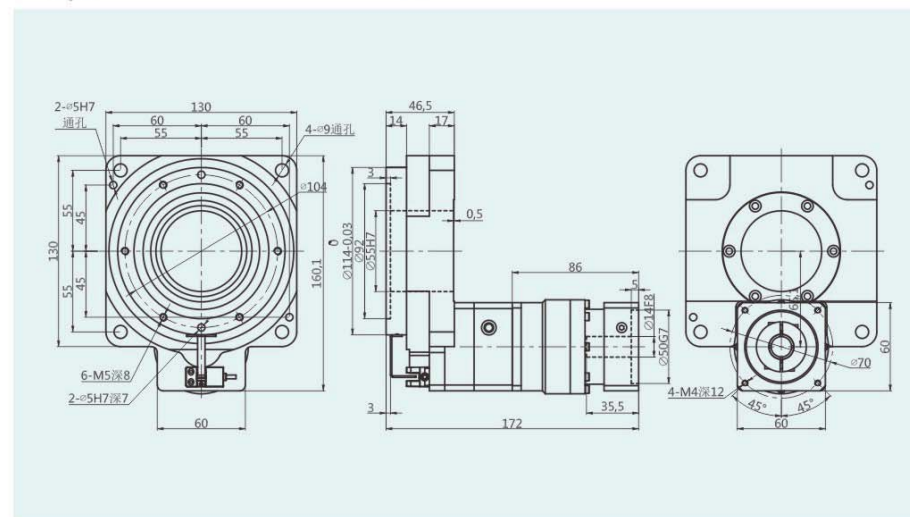


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。


系列 Serial	型号规格 Model	选配 Optional	速比 Ratio	电机轴径 Motor Shaft Diameter	电机定位凸台 Motor Positioning Convex	电机安装孔距 Motor Installation Hole Distance
HRT	130	RL: 直角标准	10/18			注: (伺服电机安装面对角孔距) (步进电机安装面单边孔距)
HRTJ	200	RY: 直角右				
HRTZ	280	RZ: 直角左				
HRM		JS: 同轴减速机				
HRMD						
HRN		RL: Right angle-Standard RY: Right angle-Right Direction RZ: Right angle-Left Direction JS: Coaxial Reducer			Note: Diagonal hole distance for Servo Motor Unilateral hole distance for Stepper Motor	

型号 Model			HRTJ200		HRTJ200JS				
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing						
减速比	Reduction ratio	I	10	18	30	40	50	70	100
额定输出扭矩	Rated output torque	N.m	90	65	90	90	90	90	90
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque						
定位精度	Positioning accuracy	arc-min	≤1		≤3				
反复定位精度	Repeated positioning accuracy	arc-sec	≤15		≤30				
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation						
适配伺服马达	Adapt to servo motor	W	750-1000						
适配步进马达	Suitable for stepping motor		86-110 步进 Stepper NEMA 23						
容许轴向负载	Allowable axial load	N	5000						
容许惯性力矩	Allowable moment of inertia	N.m	100						
扭转刚性	Torsional rigidity	N.m/arcmin	32						
倾覆力矩	Overturning moment	N.m	1820						
精度寿命	Accuracy life	h	30000h (间歇运转) Intermittent operation						
防护等级	Protection level	IP	50						
润滑方式	Lubrication method		长效润滑 Long-term lubrication						
安装方式	Installation method		任意 Horizontal / Vertical / Suspension						
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01						
旋转平台平行度	Parallelism of rotating platform	mm	≤0.02						
传动效率	Transmission efficiency	%	95		90				
噪音	Noise	db	≤63		≤63				
重量	Weight	kg	10		13.3				
设计承重	Design load	kg	90		65				

HRTJ200-10(18) 配750W伺服接口 for 750W Servo Interface

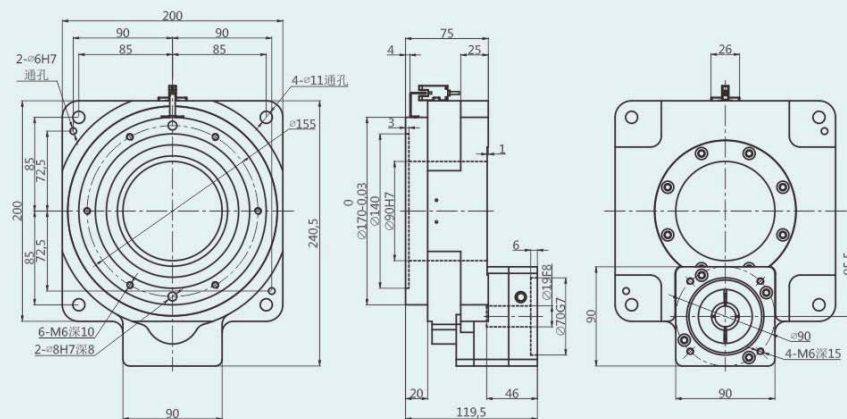

HRTJ200JS-30 配750W伺服接口 for 750W Servo Interface

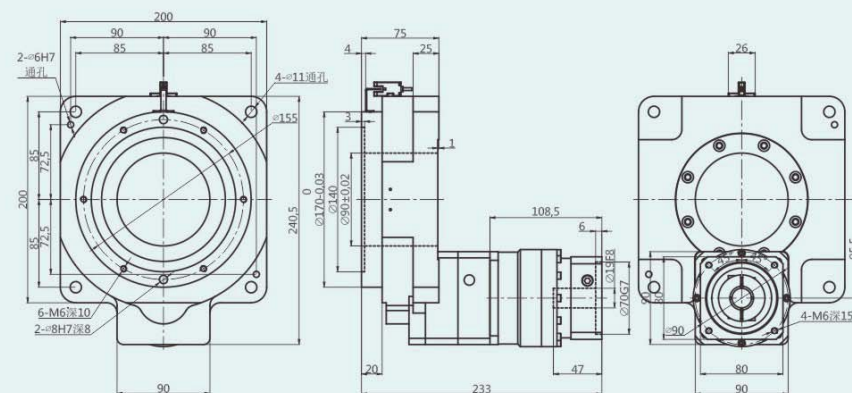

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

订货型号表示
Order Code

HRTJ - 280 - 10 - 19 - 70 - 90

系列 Serial	型号规格 Model	速比 Ratio	电机轴径 Motor Shaft Diameter	电机定位凸台 Motor Positioning Convex	电机安装孔距 Motor Installation Hole Distance
HRT	130				
HRTJ	200				
HRTZ	280				
HRM					
HRMD					
HRN					

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:
Diagonal hole distance for Servo Motor
Unilateral hole distance for Stepper Motor

技术参数
Technical Parameter


型号 Model			HRTJ280	HRTJ280JS				
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing					
减速比	Reduction ratio	I	10	30	40	50	70	100
额定输出扭矩	Rated output torque	N.m	170					
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque					
定位精度	Positioning accuracy	arc-min	≤1	≤3				
反复定位精度	Repeated positioning accuracy	arc-sec	≤15	≤30				
容许盘面转速	Allowable disk speed	rpm	150 (间歇运转) Intermittent operation					
适配伺服马达	Adapt to servo motor	W	1000-2000					
适配步进马达	Suitable for stepping motor		110 步进 Stepper					
容许轴向负载	Allowable axial load	N	10000					
容许惯量力矩	Allowable moment of inertia	N.m	200					
扭转刚性	Torsional rigidity	N.m/arcmin	58					
倾覆力矩	Overturning moment	N.m	3780					
精度寿命	Accuracy life	h	30000h (间歇运转) Intermittent operation					
防护等级	Protection level	IP	50					
润滑方式	Lubrication method		长效润滑 Long-term lubrication					
安装方式	Installation method		任意 Horizontal / Vertical / Suspension					
旋转平台同心度	Concentricity of rotating platform	mm	≤0.015					
旋转平台平行度	Parallelism of rotating platform	mm	≤0.03					
传动效率	Transmission efficiency	%	95	90				
噪音	Noise	db	≤67	≤67				
重量	Weight	kg	23	31				
设计承重	Design load	kg	170	170				

注: 旋转平台平行度有更高要求请联系我司销售人员
If the parallelism of the rotating platform has higher requirements, please contact our sales staff




外形尺寸图表
Outline dimensional

HRTJ280-10 配1KW伺服接口 for 1KW Servo Interface

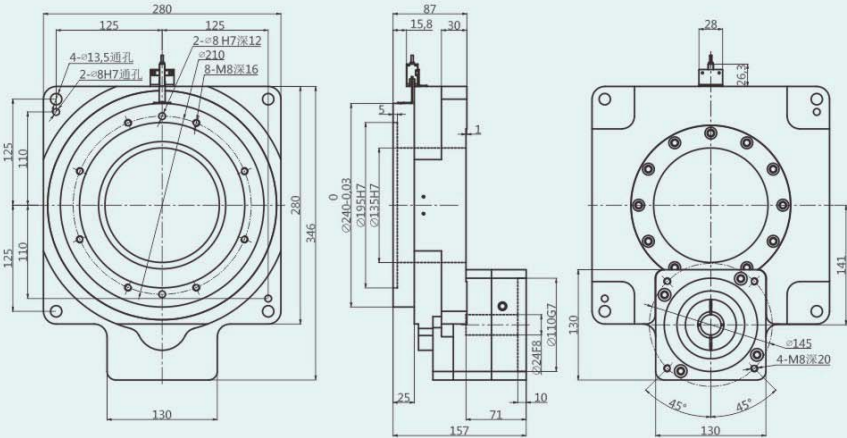

HRTJ280JS-30 配1KW伺服接口 for 1KW Servo Interface

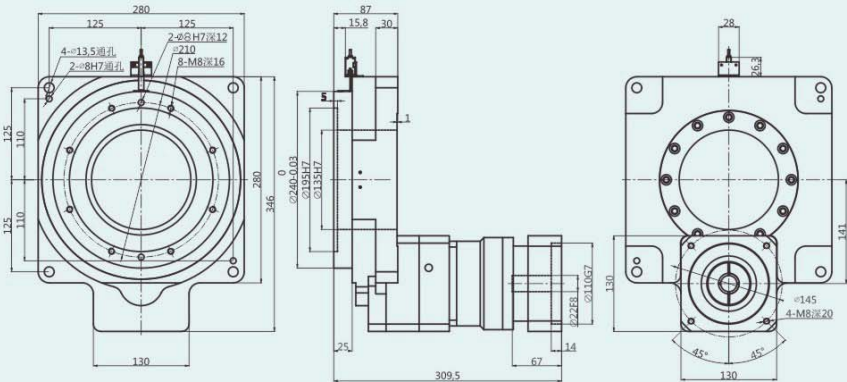

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

HRTZ Series

Heavy-duty Hollow Rotating Platform

重载型中空旋转平台



重载型中空旋转平台
Heavy-duty Hollow Rotating Platform



订货型号表示

Order Code

HRTZ	-	200	-	50	-	19	-	70	-	90
系列 Serial		型号规格 Model		速比 Ratio		电机轴径 Motor Shaft Diameter		电机定位凸台 Motor Positioning Convex		电机安装孔距 Motor Installation Hole Distance
HRT HRTJ HRTZ HRM HRMD HRN		200 280		L1: 20/25/35/50 L2: 100/200//250/350/500						注: (伺服电机安装面对角孔距) (步进电机安装面单边孔距) Note: Diagonal hole distance for Servo Motor Unilateral hole distance for Stepper Motor

技术参数


Technical Parameter

型号 Model			HRTZ200-L1				HRTZ200-L2				
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing								
减速比	Reduction ratio	I	20	25	35	50	100	200	250	350	500
额定输出扭矩	Rated output torque	N.m	200								
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque								
定位精度	Positioning accuracy	arc-min	≤2				≤4				
反复定位精度	Repeated positioning accuracy	arc-sec	≤30			≤60					
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation								
适配伺服马达	Adapt to servo motor	W	750-1500								
适配步进马达	Suitable for stepping motor		86-110 步进 Stepper NEMA 34								
容许轴向负载	Allowable axial load	N	6000								
容许惯性力矩	Allowable moment of inertia	N.m	200								
扭转刚性	Torsional rigidity	N.m/arcmin	60								
倾覆力矩	Overturning moment	N.m	2100								
精度寿命	Accuracy life	h	30000h (间歇运转) Intermittent operation								
防护等级	Protection level	IP	50								
润滑方式	Lubrication method		长效润滑 Long-term lubrication								
安装方式	Installation method		任意 Horizontal / Vertical / Suspension								
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01								
旋转平台平行度	Parallelism of rotating platform	mm	≤0.02								
传动效率	Transmission efficiency	%	95			90					
噪音	Noise	db	≤63			≤63					
重量	Weight	kg	12			13.6					
设计承重	Design load	kg	200			200					


注: 旋转平台平行度有更高要求请联系我司销售人员
If the parallelism of the rotating platform has higher requirements, please contact our sales staff

外形尺寸图表
Outline dimensional

HRTZ200-L1 配750伺服接口 for 750W Servo Interface

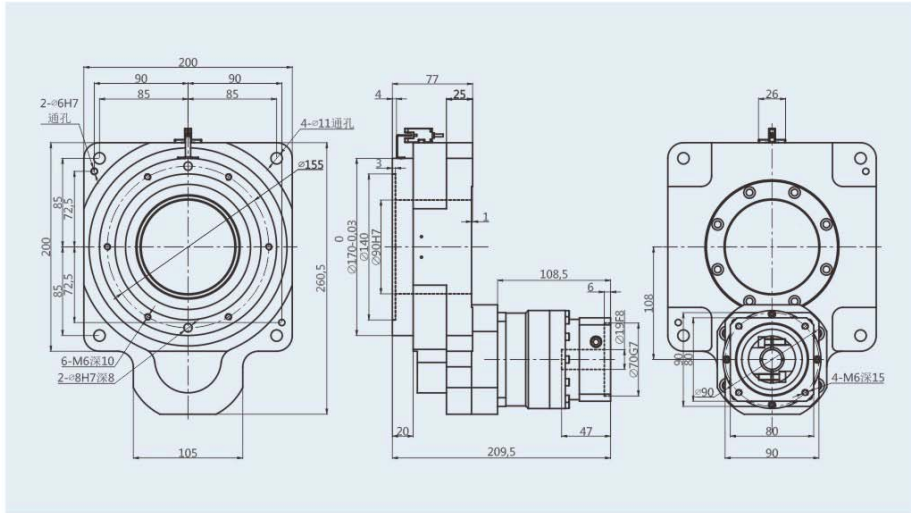

HRTZ200-L2 配750伺服接口 for 750W Servo Interface

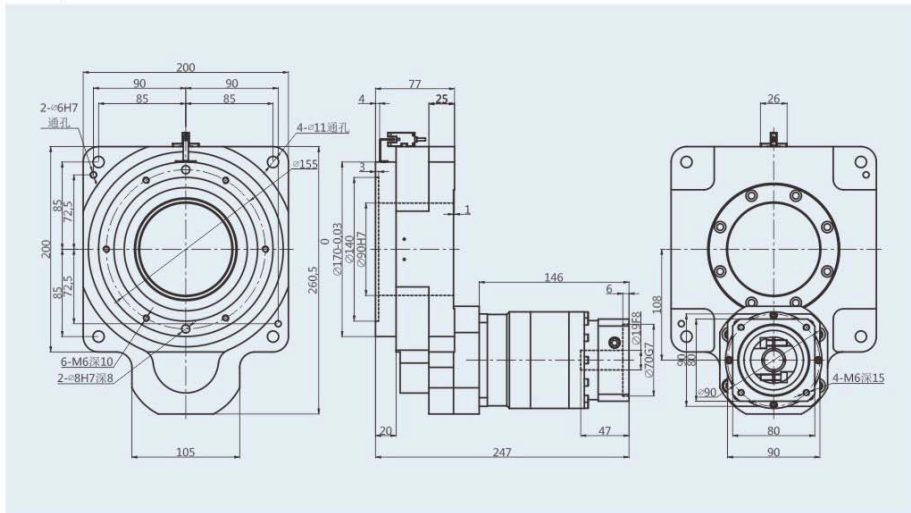

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

订货型号表示
Order Code

HRTZ	-	280	-	50	-	24	-	110	-	145
系列 Serial		型号规格 Model		速比 Ratio		电机轴径 Motor Shaft Diameter		电机定位凸台 Motor Positioning Convex		电机安装孔距 Motor Installation Hole Distance
HRT HRTJ HRTZ HRM HRMD HRN		200 280		L1: 20/25/35/50 L2: 100/200//250/350/500						注: (伺服电机安装面对角孔距) (步进电机安装面单边孔距)
Note: Diagonal hole distance for Servo Motor Unilateral hole distance for Stepper Motor										

技术参数

Technical Parameter


型号 Model			HRTZ280-L1				HRTZ280-L2				
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing								
减速比	Reduction ratio	I	20	25	35	50	100	200	250	350	500
额定输出扭矩	Rated output torque	N.m	400								
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque								
定位精度	Positioning accuracy	arc-min	≤2				≤4				
反复定位精度	Repeated positioning accuracy	arc-sec	≤30				≤60				
容许盘面转速	Allowable disk speed	rpm	150 (间歇运转) Intermittent operation								
适配伺服马达	Adapt to servo motor	W	1000-3000								
适配步进马达	Suitable for stepping motor		110-130 步进 Stepper								
容许轴向负载	Allowable axial load	N	13000								
容许惯性力矩	Allowable moment of inertia	N.m	400								
扭转刚性	Torsional rigidity	N.m/arcmin	90								
倾覆力矩	Overturning moment	N.m	4300								
精度寿命	Accuracy life	h	20000h (间歇运转) Intermittent operation								
防护等级	Protection level	IP	50								
润滑方式	Lubrication method		长效润滑 Long-term lubrication								
安装方式	Installation method		任意 Horizontal / Vertical / Suspension								
旋转平台同心度	Concentricity of rotating platform	mm	≤0.015								
旋转平台平行度	Parallelism of rotating platform	mm	≤0.03								
传动效率	Transmission efficiency	%	95				90				
噪音	Noise	db	≤67				≤67				
重量	Weight	kg	30				33				
设计承重	Design load	kg	400				400				

⑤ 旋转平台平行度有更高要求请联系我司销售人员
If the parallelism of the rotating platform has higher requirements, please contact our sales staff




外形尺寸图表 Outline dimensional

HRTZ280-L1 配1KW伺服接口 for 1KW Servo Interface

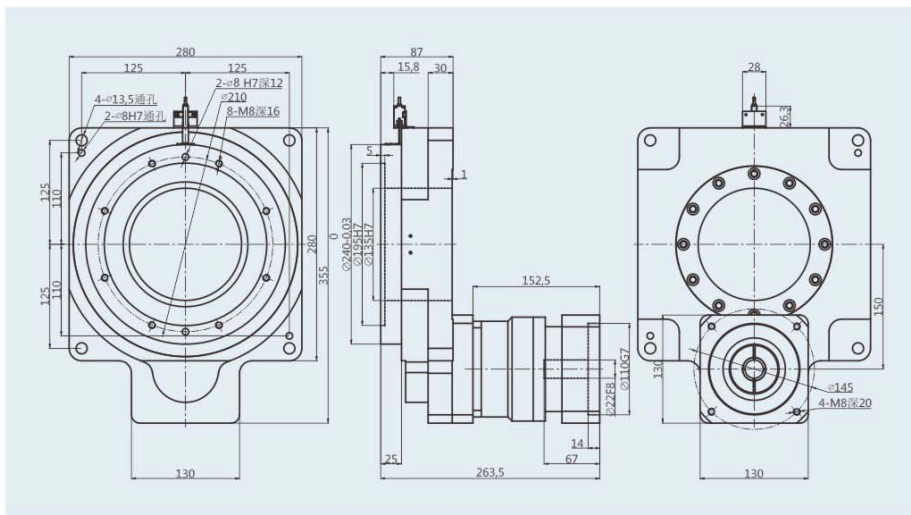

HRTZ280-L2 配1KW伺服接口 for 1KW Servo Interface

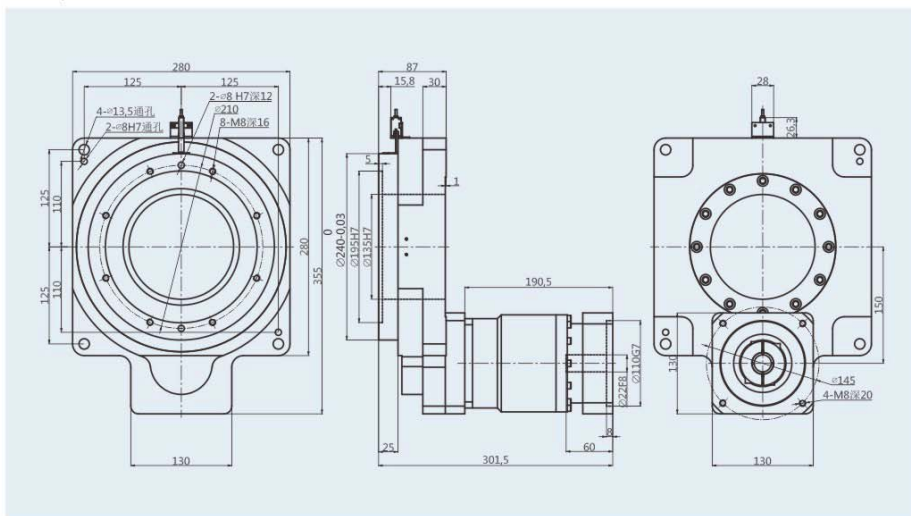


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

HRM Series

Right-angle Hollow Rotating Platform

直角型中空旋转平台



订货型号表示
Order Code

HRM - 130 - 30 - 14 - 50 - 70

系列
Serial

型号规格
Model

速比
Ratio

电机轴径
Motor Shaft
Diameter

电机定位凸台
Motor Positioning
Convex

电机安装孔距
Motor Installation
Hole Distance

HRT
HRTJ
HRTZ
HRM
HRMD
HRN

130
180

L1: 15/21/30
L2: 60/75/105/120/150/210/300

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:
Diagonal hole distance for Servo Motor
Unilateral hole distance for Stepper Motor


技术参数
Technical Parameter

型号 Model			HRM130-L1			HRM130-L2						
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing									
减速比	Reduction ratio	i	15	21	30	60	75	105	120	150	210	300
额定输出扭矩	Rated output torque	N.m	150	130	105	150	150	150	150	150	130	105
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque									
定位精度	Positioning accuracy	arc-min	≤ 2			≤ 4						
反复定位精度	Repeated positioning accuracy	arc-sec	≤30			≤60						
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation									
适配伺服马达	Adapt to servo motor	W	200-400									
适配步进马达	Suitable for stepping motor		57 步进 Stepper NEMA 23									
容许轴向负载	Allowable axial load	N	7300									
容许径向负载	Allowable radial load	N	7300									
设计承重	Design load	Kg	50									
容许惯性力矩	Allowable moment of inertia	N.m	50									
扭转刚性	Torsional rigidity	N.m/arcmin	25									
倾覆力矩	Overturning moment	N.m	520									
精度寿命	Accuracy life	h	20000h (间歇运转) Intermittent operation									
防护等级	Protection level	IP	54									
润滑方式	Lubrication method		长效润滑 Long-term lubrication									
安装方式	Installation method		任意 Horizontal / Vertical / Suspension									
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01									
旋转平台平行度	Parallelism of rotating platform	mm	≤0.01									
传动效率	Transmission efficiency	%	95			90						
噪音	Noise	db	≤57			≤57						
重量	Weight	kg	7			7.6						


注 旋转平台平行度有更高要求请联系我司销售人员
If the parallelism of the rotating platform has higher requirements, please contact our sales staff

外形尺寸图表
Outline dimensional

HRM130-L1 配400W伺服接口 for 400W Servo Interface

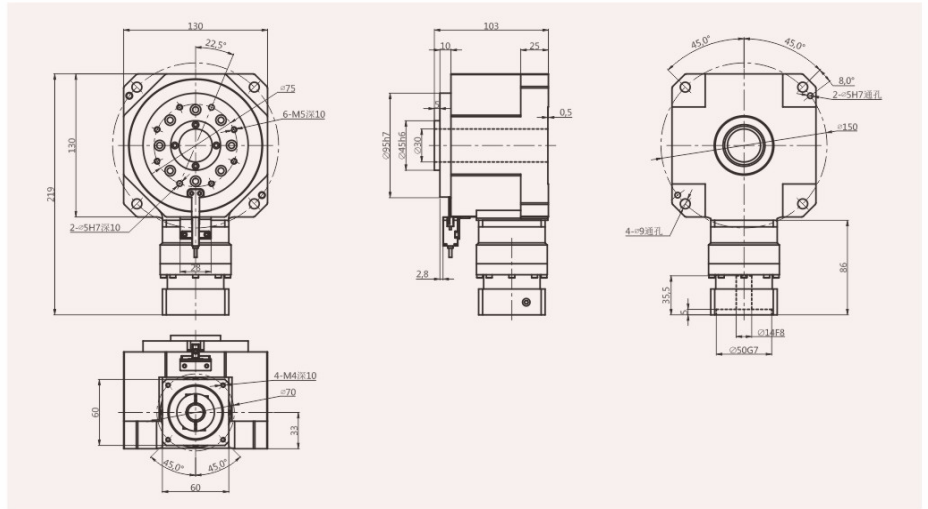

HRM130-L2 配400W伺服接口 for 400W Servo Interface

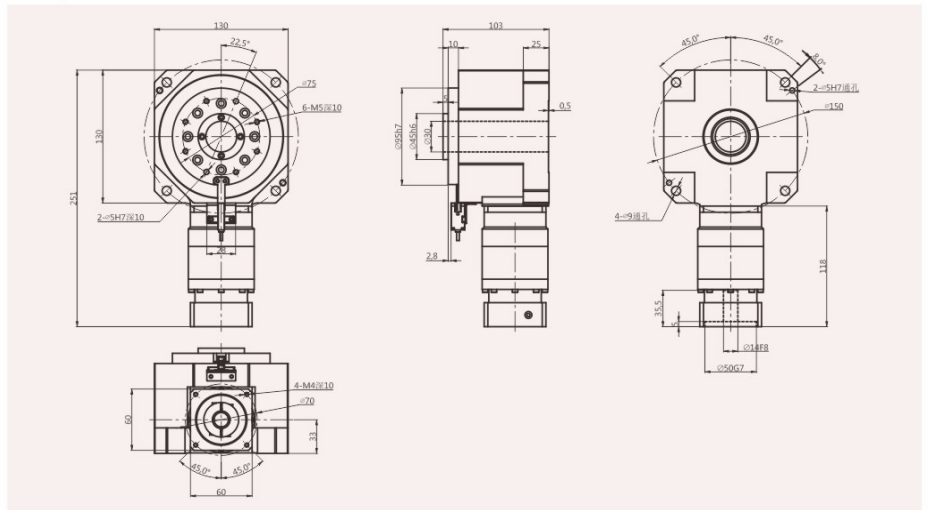

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

系列
Serial

型号规格
Model

速比
Ratio

电机轴径
Motor Shaft
Diameter

电机定位凸台
Motor Positioning

电机安装孔距
Motor Installation
Hole Distance

HRT
HRTJ
HRTZ
HRM
HRMD
HRN

130	L1: 15/21/30
180	L2: 60/75/105/120/150/210/300

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:

Diagonal hole distance for Servo Motor


Unilateral hole distance for Stepper Motor

技术参数 Technical Parameter


型号 Model			HRM180-L1			HRM180-L2						
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing									
减速比	Reduction ratio	i	15	21	30	60	75	105	120	150	210	300
额定输出扭矩	Rated output torque	N.m	430	400	360	430	430	430	430	430	400	360
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque									
定位精度	Positioning accuracy	arc-min	≤ 2				≤4					
反复定位精度	Repeated positioning accuracy	arc-sec	≤30				≤60					
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation									
适配伺服马达	Adapt to servo motor	W	750W-1500W									
适配步进马达	Suitable for stepping motor		86/110 Stepper NEMA 34/42									
容许轴向负载	Allowable axial load	N	13500									
容许径向负载	Allowable radial load	N	13500									
设计承重	Design load	Kg	150									
容许惯性力矩	Allowable moment of inertia	N.m	110									
扭转刚性	Torsional rigidity	N.m/arcmin	45									
倾覆力矩	Overturning moment	N.m	1420									
精度寿命	Accuracy life	h	20000h (间歇运转) Intermittent operation									
防护等级	Protection level	IP	54									
润滑方式	Lubrication method		长效润滑 Long-term lubrication									
安装方式	Installation method		任意 Horizontal / Vertical / Suspension									
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01									
旋转平台平行度	Parallelism of rotating platform	mm	≤0.01									
传动效率	Transmission efficiency	%	95				90					
噪音	Noise	db	≤63				≤63					
重量	Weight	kg	17				19					

注 旋转平台平行度有更高要求请联系我司销售人员
If the parallelism of the rotating platform has higher requirements, please contact our sales staff

HRM180-L1 配750W伺服接口 for 750W Servo Interface

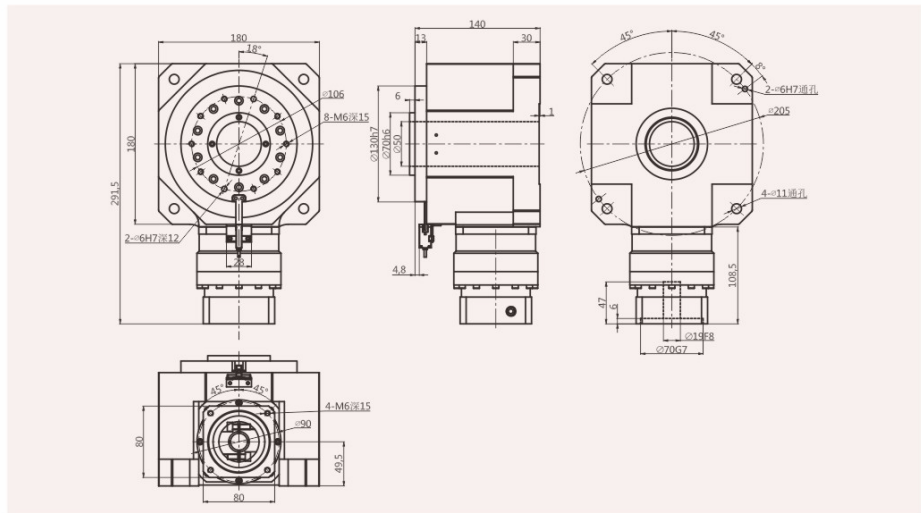

HRM180-L2 配750W伺服接口 for 750W Servo Interface

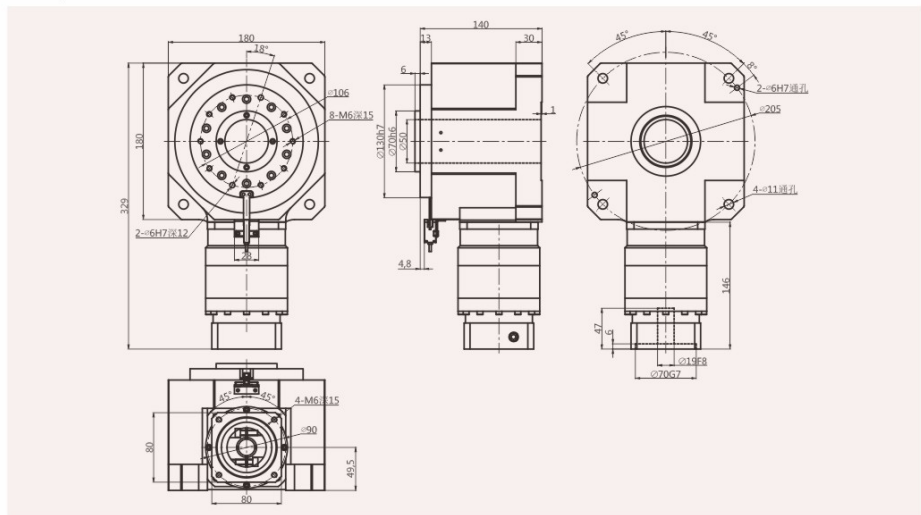

* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

订货型号表示
Order Code

HRM - 260 - 30 - 19 - 70 - 90

系列
Serial

型号规格
Model

速比
Ratio

电机轴径
Motor Shaft
Diameter

电机定位凸台
Motor Positioning
Convex

电机安装孔距
Motor Installation
Hole Distance

HRT
HRTJ
HRTZ
HRM
HRMD
HRN

130

180

260

L1: 15/21/30

L2: 60/75/105/120/150/210/300

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:

Diagonal hole distance for Servo Motor
Unilateral hole distance for Stepper Motor

技术参数

Technical Parameter

型号 Model			HRM260-L1			HRM260-L2						
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing									
减速比	Reduction ratio	i	15	21	30	60	75	105	120	150	210	300
额定输出扭矩	Rated output torque	N.m	2950	2650	2200	2950	2950	2950	2950	2950	2650	2200
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque									
定位精度	Positioning accuracy	arc-min	≤2				≤4					
反复定位精度	Repeated positioning accuracy	arc-sec	≤30				≤60					
容许盘面转速	Allowable disk speed	rpm	200 (间歇运转) Intermittent operation									
适配伺服马达	Adapt to servo motor	W	2000-5000									
适配步进马达	Suitable for stepping motor		130-150 步进 Stepper									
容许轴向负载	Allowable axial load	N	29600									
容许径向负载	Allowable radial load	N	29600									
设计承重	Design load	Kg	1000									
容许惯性力矩	Allowable moment of inertia	N.m	750									
扭转刚性	Torsional rigidity	N.m/arcmin	175									
倾覆力矩	Overturning moment	N.m	6300									
精度寿命	Accuracy life	h	20000h (间歇运转) Intermittent operation									
防护等级	Protection level	IP	54									
润滑方式	Lubrication method		长效润滑 Long-term lubrication									
安装方式	Installation method		任意 Horizontal / Vertical / Suspension									
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01									
旋转平台平行度	Parallelism of rotating platform	mm	≤0.01									
传动效率	Transmission efficiency	%	95				90					
噪音	Noise	db	≤67				≤67					
重量	Weight	kg	46				52					


※ 旋转平台平行度有更高要求请联系我司销售人员

If the parallelism of the rotating platform has higher requirements, please contact our sales staff


外形尺寸图表

Outline dimensional

HRM260-L1 配1kW伺服接口 for 750W Servo Interface

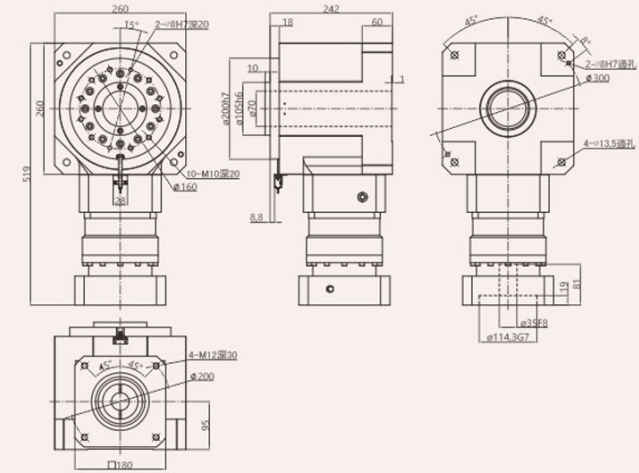


HRM260-L2 配1kW伺服接口 for 750W Servo Interface

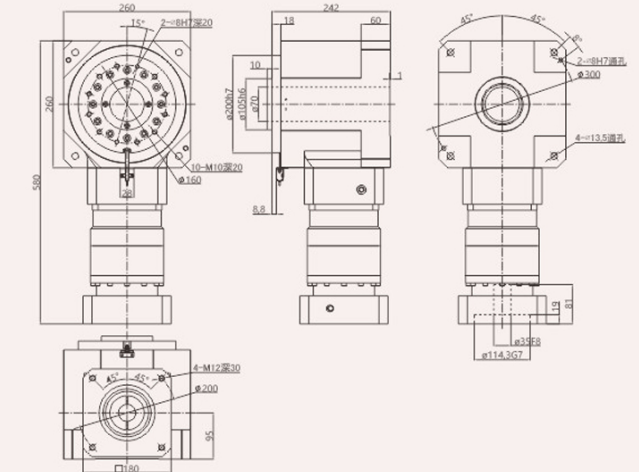


* 以上技术参数仅供参考, 实际根据客户提供的数据, 会出具相关的技术参数及尺寸。

外形尺寸图表 Outline dimensional

HRMD225-L1 配1KW伺服接口 for 1KW Servo Interface

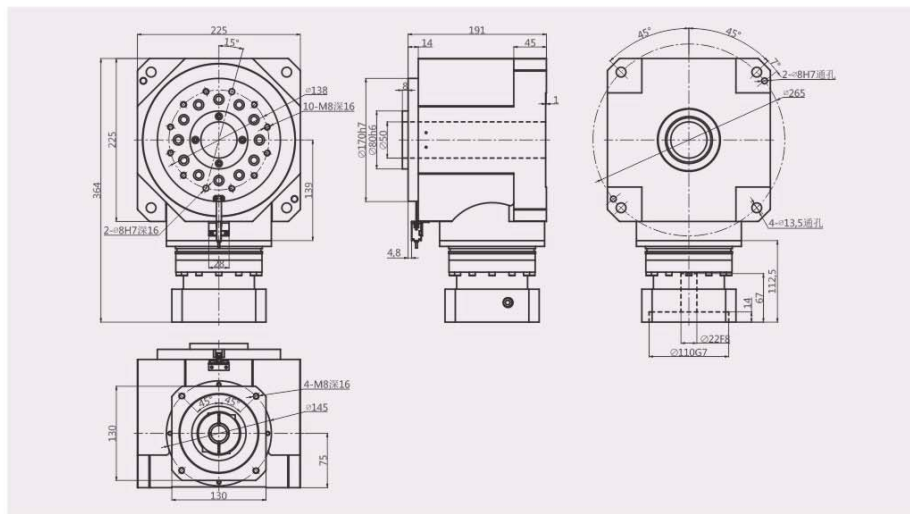

HRMD225-L2 配1KW伺服接口 for 1KW Servo Interface

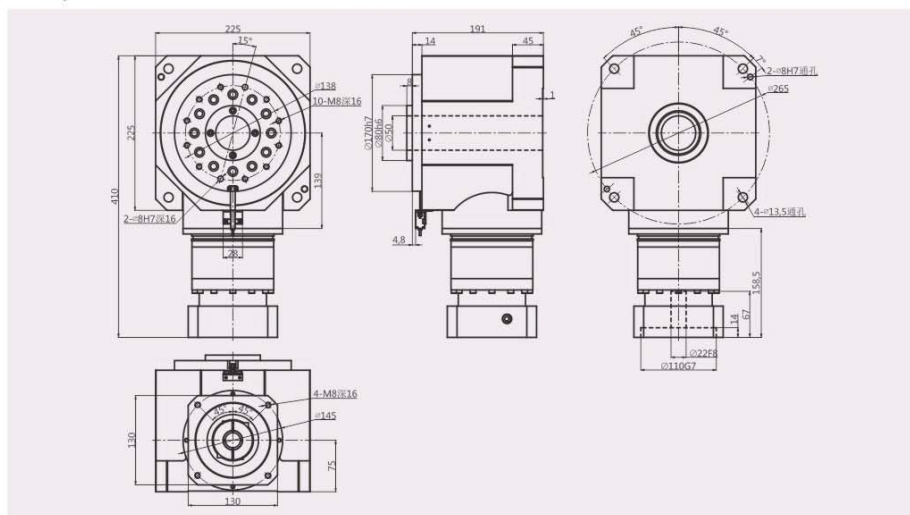

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

HRN Series

Inner Ring Rotating Hollow Rotating Platform

内圈式旋转中空旋转平台



订货型号表示
Order Code

HRN

230

10

24

110

145

系列
Serial

型号规格
Model

速比
Ratio

电机轴径
Motor Shaft Diameter

电机定位凸台
Motor Positioning Convex

电机安装孔距
Motor Installation Hole Distance

HRT

HRTJ

HRTZ

HRM

HRMD

HRN

230

注: (伺服电机安装面对角孔距)
(步进电机安装面单边孔距)

Note:
Diagonal hole distance for Servo Motor
Unilateral hole distance for Stepper Motor




技术参数
Technical Parameter

型号 Model			HRN230
轴承结构	Bearing structure		交叉滚子轴承 Cross roller bearing
减速比	Reduction ratio	I	10
额定输出扭矩	Rated output torque	N.m	100
最大输出扭矩	Output torque	N.m	3倍额定扭矩 3 Times rated torque
定位精度	Positioning accuracy	arc-min	≤1
反复定位精度	Repeated positioning accuracy	arc-sec	≤15
容许盘面转速	Allowable disk speed	rpm	150 (间歇运转) Intermittent operation
适配伺服马达	Adapt to servo motor	W	750-1500
容许径向负载	Allowable radial load	N	8000
容许轴向负载	Allowable axial load	N	4000
倾覆力矩	Overturning moment	N.m	2750
扭转刚性	Torsional rigidity	N.m/arcmin	40
转动惯量	Moment of inertia	N.m²	2.3*10 ⁻³
精度寿命	Accuracy life	h	20000h (间歇运转) Intermittent operation
防护等级	Protection level	IP	54
润滑方式	Lubrication method		长效润滑 Long-term lubrication
安装方式	Installation method		任意 Horizontal / Vertical / Suspension
旋转平台同心度	Concentricity of rotating platform	mm	≤0.01
旋转平台平行度	Parallelism of rotating platform	mm	≤0.02
传动效率	Transmission efficiency	%	90
噪音	Noise	db	≤73
重量	Weight	kg	17
设计承重	Design load	kg	120

* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。


外形尺寸图表
Outline dimensional

HRN230-10 配1KW伺服接口 for 1KW Servo Interface

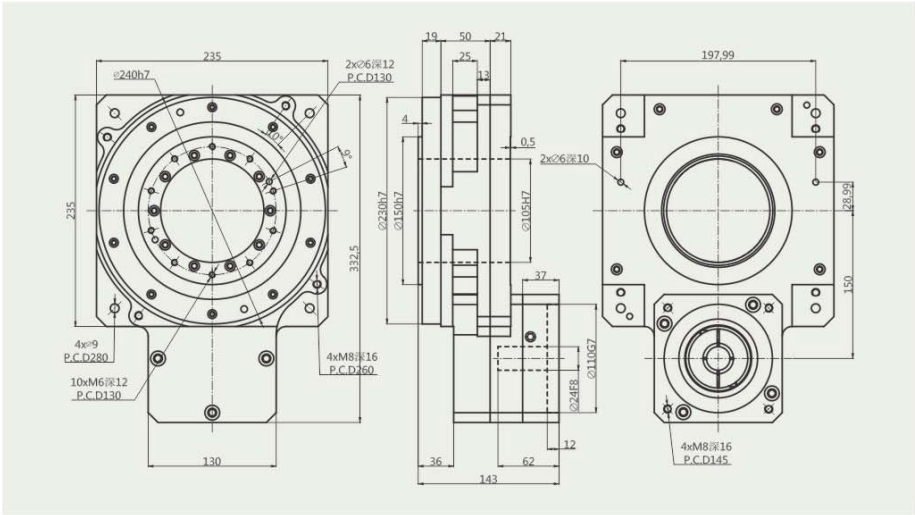


* 以上技术参数仅供参考，实际根据客户提供的数据，会出具相关的技术参数及尺寸。

Description Of Connecting Motor To Hollow Rotating Platform
中空旋转平台连接马达说明

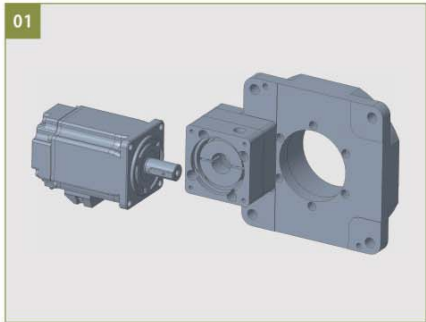


先确认马达和旋转平台是否完好。核对马达与旋转平台连接尺寸是否正确，并将两者配合面擦拭干净。

First confirm whether the motor and rotating platform are in good condition. Check whether the connection size between the motor and the rotating platform is correct, and wipe the mating surfaces of the two clean.

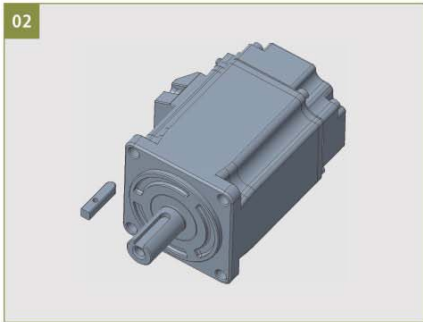


取下马达上原有的平键。

Remove the original flat key on the motor.

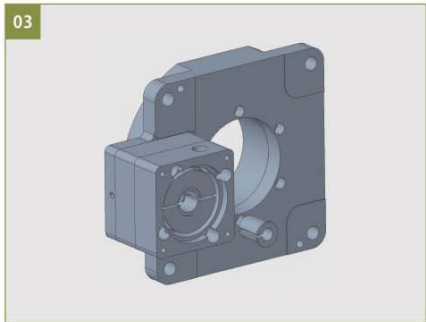


确定马达轴径，如需轴套，请先装进入力孔内，并与锁紧环的开槽口对齐。

Determine the motor shaft diameter. If a shaft sleeve is required, please install it into the force hole first and align it with the notch of the locking ring.

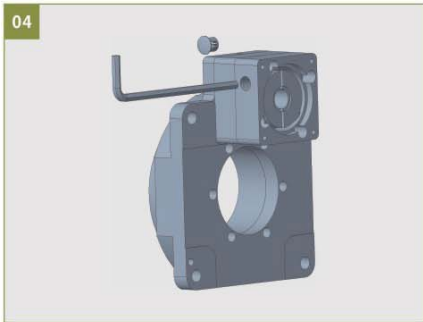


取出塞头，调整输入轴锁紧环使其紧固螺丝与塞头孔对齐，插入内六角扳手。

Take out the plug, adjust the input shaft locking ring so that the tightening screw is aligned with the plug hole, and insert an Allen key.

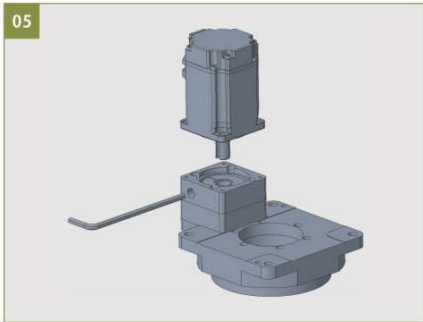


将马达垂直与旋转平台自然连接，严禁敲打。防止轴向力过大损坏轴承或齿轮。

Connect the motor vertically to the rotating platform naturally, and no beating is allowed. To prevent excessive axial force from damaging bearings or gears.

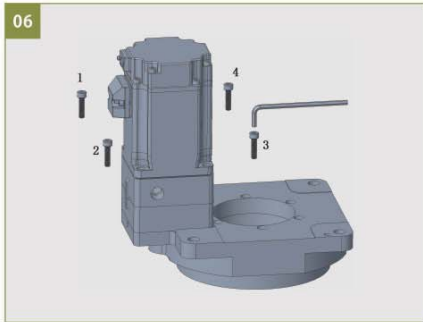


为保证受力均匀，请先将1，3对角位置的安装螺丝拧上，但不要拧紧；再拧2，4两个对角的安装螺丝。最后逐个拧紧四个安装螺丝。

In order to ensure uniform force, please screw up the installation screws at the diagonal position 1, 3 first, but do not tighten; then screw the two diagonal installation screws 2, 4. Finally, tighten the four mounting screws one by one.

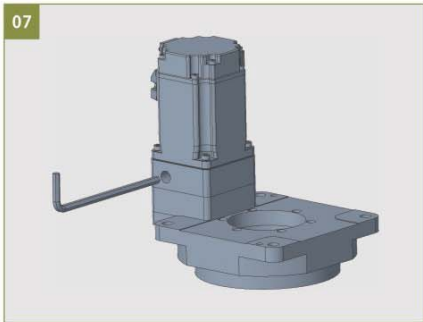

锁紧抱紧螺丝。如抱紧螺丝有两颗，请一定要对称均匀锁紧。

Tighten the screws tightly. If there are two holding screws, please tighten them evenly and symmetrically.

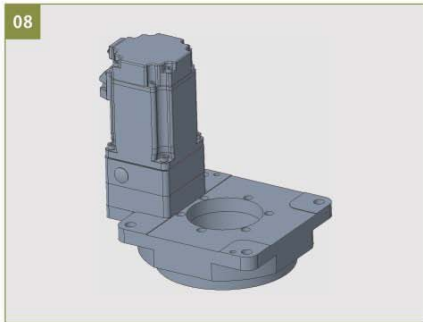

装回塞头。

Replace the plug.

型号 Model	HRT62	HRT85	HRT130	HRT200	HRT280
	/	/	HRTJ130	HRTJ200	HRTJ280
	/	/	/	HRTZ200	HRTZ280
	HRT130	/	HRM180	/	/
	/	/	HRMD180	/	HRMD225
	/	/	/	/	HRN230
抱紧螺丝规格	M4	M5	M6	M8	M8
锁紧扭矩(Nm)	6	10	16.3	41	41


Hollow Rotating Platform Installation Instructions

中空旋转平台安装说明

如何安装中空旋转平台 How to install hollow rotating platform

首先在定制机械设备安装板时需在安装板上预留出马达出口及安装孔位，以便露出中空旋转平台的马达部分。然后利用 2 个定位销孔（HRT62 中定位销孔与安装孔是共享的），将中空旋转平台如下图安装到机械设备安装板上。再用螺丝将中空旋转平台牢牢固定在安装板上。（如下图）


First, when customizing the mechanical equipment mounting plate, it is necessary to reserve a motor outlet and mounting hole on the mounting plate to expose the motor part of the hollow rotating platform. Then use the two positioning pin holes (the positioning pin holes and the mounting holes in HRT62 are shared) to install the hollow rotating platform on the mechanical equipment mounting plate as shown below. Then use screws to firmly fix the hollow rotating platform on the mounting plate. (As shown below)

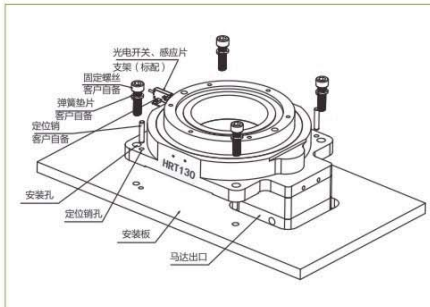

如何在中空旋转平台上安装负载 How to install a load on a hollow rotating platform

使用中空旋转平台转盘上的 6 个安装螺丝孔安装负载。中空旋转平台转盘上有 2 个安装负载用的销孔，可用于确定负载的位置，务必将定位销牢牢固定在负载上。

Use the 6 mounting screw holes on the turntable of the hollow rotating platform to install the load. There are two pin holes for load installation on the turntable of the hollow rotating platform, which can be used to determine the position of the load. The positioning pins must be firmly fixed on the load.

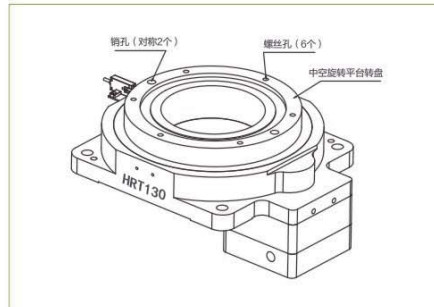


定位销孔尺寸 Locating pin hole size

平台型号 Platform model	销孔直径 Pin hole diameter mm	销孔深度 Pin hole depth mm	销孔数量 Number of pin holes
HRT85	Φ4(H7)	6(穿孔) THRU	2
HRT130	Φ5(H7)	7(穿孔)	2
HRTJ130			
HRT200			
HRTJ200	Φ8(H7)	8(穿孔) THRU	2
HRTZ200			
HRT280			
HRTJ280	Φ8(H7)	12(穿孔) THRU	2
HRTZ280			
HRM130	Φ5(H7)	10(穿孔) THRU	2
HRM/HRMD180	Φ6(H7)	12(穿孔) THRU	2
HRMD225	Φ8(H7)	16(穿孔) THRU	2

Applications


应用案例

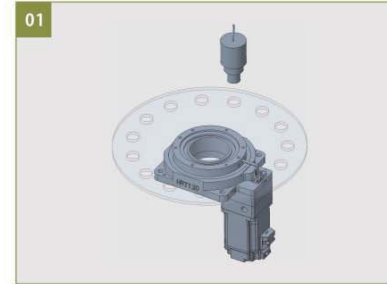


高精度定位的应用
High-precision positioning applications




使用中空孔的应用
Applications using hollow holes

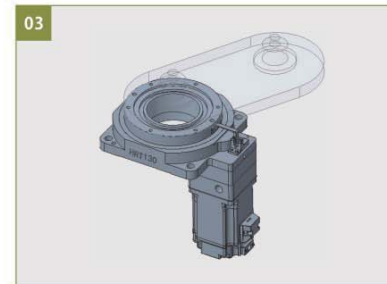

施加力矩负载的应用
Application of applied moment load

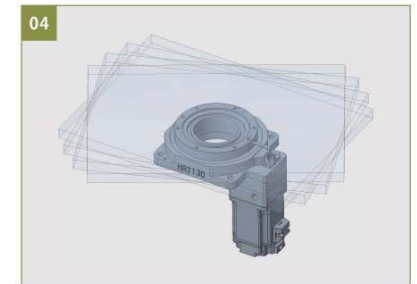

大惯量载具做任意角度旋转的应用
Application of large inertia vehicle to rotate at any angle

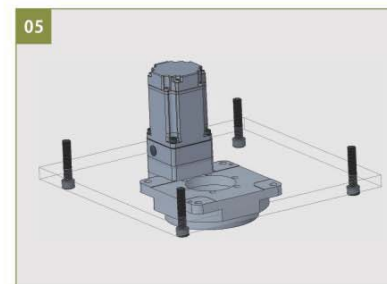

吊装
Hoisting



侧装
Side loading